




# UP56 Pure


PURE RELIABILITY

Level sensors

**SICK**  
Sensor Intelligence.

## PURE RELIABILITY





**Additional information**

Detailed technical data . . . . . 3

Ordering information . . . . . 4

Type code . . . . . 4

Dimensional drawings . . . . . 5

Electrical connection . . . . . 5

Connection diagram . . . . . 5

Accessories . . . . . 5

### Product description

The non-contact ultrasonic level sensors from the UP56 Pure product family are a range of products specialized for wet chemical processes in the electronic and solar industry. Due to their PTFE-protected transducer they are very hardwearing and durable and are designed to be used in highly concentrated acids and alkalines. The UP56 Pure is easy and fast to integrate thanks to the industry-specific GF process connection. A high level of accuracy can also be achieved with fluctuating liquid densi-

ties, thus facilitating the use of dosing applications. In systems where the installation is extremely cramped, the UP56 Pure Mini is the perfect solution thanks to its very compact design. The use in containers with a lot of built-in components is easily resolved by means of an immersion pipe. The measurement range, output, and filters of the UP56 product family is easy and convenient to adjust with the PC-based programming tool Connect+.

### At a glance

- Ultrasonic level sensor with very high chemical resistance
- Non-contact measurement in immersion pipe of up to 1,500 mm
- PTFE-coated membrane and GF D40 process connection made of PTFE
- Pressure resistant up to 6 bar, temperature resistant up to 85°C
- Different sizes available
- Analog output selectable between 4 mA to 20 mA and 0 V to 10 V
- Switching output for monitoring the maximum and minimum limit

### Your benefits

- Non-contact and non-wearing measurement reduces maintenance and servicing cost
- Sensor replacement possible even with chemicals present, thus saving time and increasing availability
- Universally applicable with acidic and alkaline processes
- Flexible measurement system for different container sizes provides cost reductions
- High accuracy measurements, even in liquids with density fluctuations
- Faultless operation with very limited installation space in the tote
- Switching output and analog output in a single sensor reduces time and money spent on wiring
- Simple and time-saving configuration with Connect+

→ [www.sick.com/UP56\\_Pure](http://www.sick.com/UP56_Pure)

For more information, simply enter the link or scan the QR code and get direct access to technical data, CAD design models, operating instructions, software, application examples, and much more.



## Detailed technical data

## Features

	UP56-211	UP56-212	UP56-216
Medium	Fluids		
Measurement	Switch, continuous		
Measuring range in tank	30 mm ... 250 mm	85 mm ... 350 mm	65 mm ... 700 mm
Measuring range immersion tube	30 mm ... 500 mm	85 mm ... 1,500 mm	65 mm ... 1,500 mm
Process pressure	0 bar ... 6 bar, gauge pressure for UP56 Pure mini (depending on type)		
Process temperature	-25 °C ... +85 °C		

## Performance

	UP56-211	UP56-212	UP56-216
Accuracy of sensor element	≤ 1 % <sup>1)</sup>		
Repeatability	± 0.15 % <sup>1)</sup>		
Resolution	≤ 0.025 mm	≤ 0.18 mm	
Response time	≤ 84 ms <sup>2)</sup>		
Display	Without design specifics		

<sup>1)</sup> From the full scale value.

<sup>2)</sup> Recovery time 32 ms ... 180 ms according to EMC EN 60947-5-7.

## Mechanics

Process connection	GF connection D40
Housing material	PTFE, PP
Housing design	Standard / Mini (depending on type)
Weight	210 g 145 g UP56 Pure Mini (depending on type)

## Electronics

	UP56-211	UP56-212	UP56-216
Supply voltage	9 V DC ... 30 V DC <sup>1)</sup>		
Residual ripple	± 10 %		
Power consumption	≤ 80 mA <sup>2)</sup>		
Protection class	III		
Electrical connection	Round connector M12 x 1, 5-pin		
Output signal	1 x PNP + 4 mA ... 20 mA / 0 V ... 10 V <sup>3) 4)</sup> 4 mA ... 20 mA <sup>3) 4)</sup> (depending on type)		
Hysteresis	3 mm 3 mm <sup>5)</sup>	5 mm 5 mm <sup>5)</sup>	
Signal voltage HIGH	U <sub>v</sub> -3 V		
Output current	200 mA		
Time delay before availability	≤ 300 ms		
Enclosure rating	IP 67		
Ultrasonic frequency	320 kHz		200 kHz

<sup>1)</sup> Reverse-polarity protected.

<sup>2)</sup> At 24 V DC without output load.

<sup>3)</sup> Short-circuit protected, reversible.

<sup>4)</sup> Automatic switching between voltage and current outputs dependent on load 4 mA ... 20 mA: RL ≤ 100 / at 9 V ≤ U<sub>b</sub> ≤ 20 V; RL ≤ 500 / at U<sub>b</sub> ≥ 20 V; 0 V ... 10 V: RL ≥ 100 k / at U<sub>b</sub> ≥ 15 V, short-circuit protected.

<sup>5)</sup> Free adjustable in 1 mm steps via Connect+ Adapter (CPA)

	UP56-211	UP56-212	UP56-216
<b>Ultrasonic transducer</b>	PTFE coating, FFKM		

<sup>1)</sup> Reverse-polarity protected.

<sup>2)</sup> At 24 V DC without output load.

<sup>3)</sup> Short-circuit protected, reversible.

<sup>4)</sup> Automatic switching between voltage and current outputs dependet on load 4 mA ... 20 mA: RL ≤ 100 / at 9 V ≤ U<sub>B</sub> ≤ 20 V; RL ≤ 500/ at U<sub>B</sub> ≥ 20 V; 0 V ... 10 V: RL ≥ 100 k/ at U<sub>B</sub> ≥ 15 V, short-circuit protected.

<sup>5)</sup> Free adjustable in 1 mm steps via Connect+ Adapter (CPA)

Ambient data

<b>Ambient operating temperature</b>	-25 °C ... +70 °C <sup>1)</sup>
<b>Ambient storage temperature</b>	-40 °C ... +85 °C


<sup>1)</sup> Temperature compensation at -25 °C ... +50 °C, can be switched off.

Ordering information

- **Enclosure rating:** IP 67
- **Process connection:** GF connection D40
- **Process temperature:** -25 °C ... +85 °C
- **Housing material:** PTFE, PP
- **Electrical connection:** round connector M12 x 1, 5-pin

Output signal	Process pressure	Measuring range in tank	Measuring range immersion tube	Type	Part no.
1 x PNP + 4 mA ... 20 mA / 0 V ... 10 V	0 bar ... 6 bar	30 mm ... 250 mm	30 mm ... 500 mm	UP56-211148	6048942
4 mA ... 20 mA	0 bar ... 2 bar	30 mm ... 250 mm	30 mm ... 500 mm	UP56-211156	6050441
1 x PNP + 4 mA ... 20 mA / 0 V ... 10 V	0 bar ... 6 bar	85 mm ... 350 mm	85 mm ... 1,500 mm	UP56-212148	6048943
4 mA ... 20 mA	0 bar ... 2 bar	85 mm ... 350 mm	85 mm ... 1,500 mm	UP56-212156	6049945
1 x PNP + 4 mA ... 20 mA / 0 V ... 10 V	0 bar ... 6 bar	65 mm ... 700 mm	65 mm ... 1,500 mm	UP56-216148	6049450
4 mA ... 20 mA	0 bar ... 2 bar	65 mm ... 700 mm	65 mm ... 1,500 mm	UP56-216156	6049617


Type code

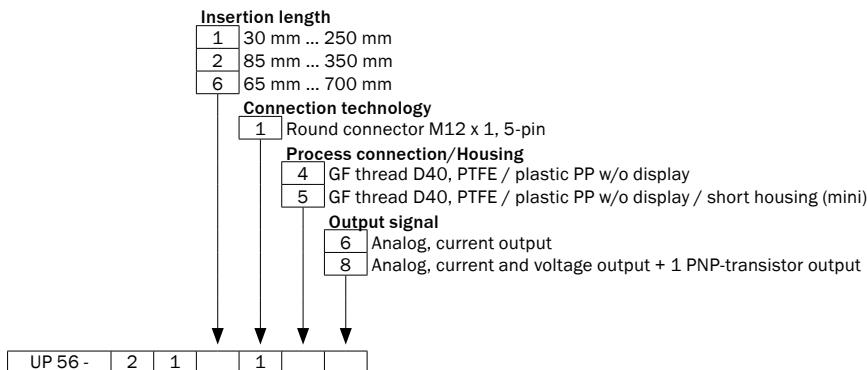


Not all variations of the type code can be combined!

**Dimensional drawings** (Dimensions in mm (inch))

UP56 Pure

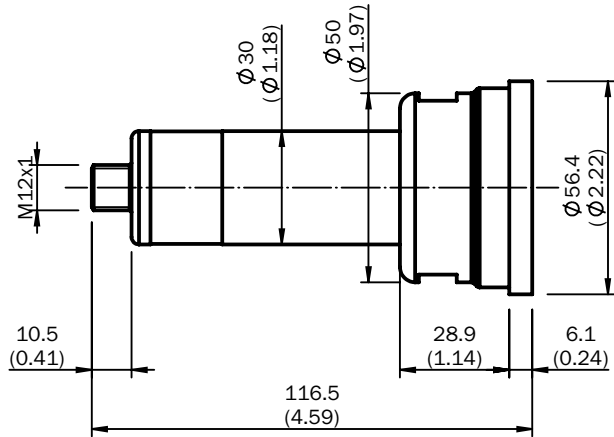

UP56 Pure Mini

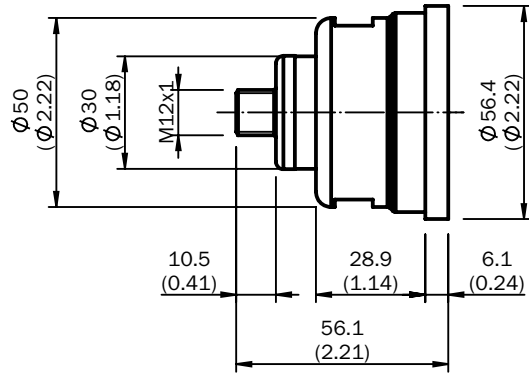

**Electrical connection**



Male connector M12, 5-pin



**Connection diagram**

1 x PNP + 4 mA ... 20 mA /  
0 V ... 10 V

4 mA ... 20 mA










**Accessories**

**Connection systems**

Plug connectors and cables


Connecting cables with female connector

	Brief description	Cable length	Type	Part no.
 Illustration may differ	Head A: female connector, M12, 5-pin, straight Head B: cable Cable: PVC, unshielded	2 m	DOL-1205-G02M	6008899
 Illustration may differ	Head A: female connector, M12, 5-pin, straight Head B: cable Cable: drag chain use, PUR, halogen-free, unshielded	2 m	DOL-1205-G02MC	6025906
 Illustration may differ	Head A: female connector, M12, 5-pin, straight Head B: cable Cable: PVC, unshielded	5 m	DOL-1205-G05M	6009868

	Brief description	Cable length	Type	Part no.
	Head A: female connector, M12, 5-pin, straight Head B: cable Cable: drag chain use, PUR, halogen-free, unshielded	5 m	DOL-1205-G05MC	6025907
 Illustration may differ	Head A: female connector, M12, 5-pin, straight Head B: cable Cable: PVC, unshielded	10 m	DOL-1205-G10M	6010544
	Head A: female connector, M12, 5-pin, straight Head B: cable Cable: drag chain use, PUR, halogen-free, unshielded	10 m	DOL-1205-G10MC	6025908
 Illustration may differ	Head A: female connector, M12, 5-pin, angled Head B: cable Cable: PVC, unshielded	2 m	DOL-1205-W02M	6008900
	Head A: female connector, M12, 5-pin, angled Head B: cable Cable: drag chain use, PUR, halogen-free, unshielded	2 m	DOL-1205-W02MC	6025909
 Illustration may differ	Head A: female connector, M12, 5-pin, angled Head B: cable Cable: PVC, unshielded	5 m	DOL-1205-W05M	6009869
		10 m	DOL-1205-W10M	6010542
	Head A: female connector, M12, 5-pin, angled Head B: cable Cable: drag chain use, PUR, halogen-free, unshielded	10 m	DOL-1205-W10MC	6025911


### Further accessories

#### Programming and configuration tools

	Brief description	Type	Part no.
	Tool for visualization, configuration and cloning, 3-digit LED display, supply voltage: DV 9 V ... 30 V	Connect+ adapter (CPA)	6037782


## REGISTER AT WWW.SICK.COM TO TAKE ADVANTAGE OF OUR FOLLOWING SERVICES FOR YOU



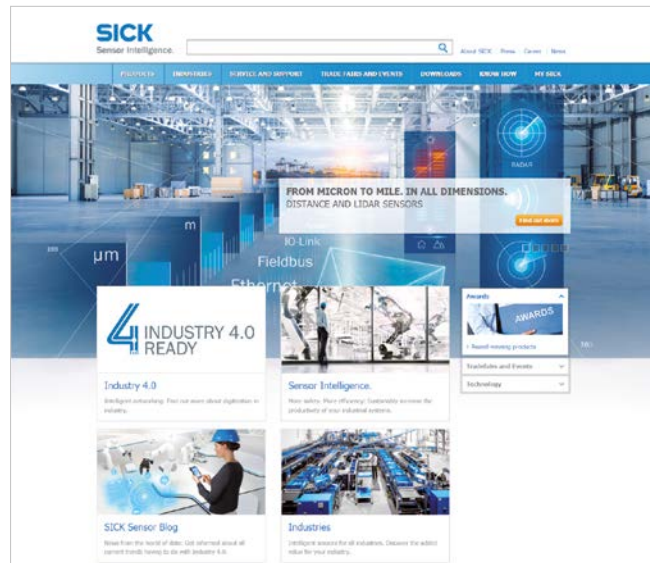


- ✔ Access information on net prices and individual discounts.
- ✔ Easily order online and track your delivery.
- ✔ Check your history of all your orders and quotes.
- ✔ Create, save, and share as many wish lists as you want.
- ✔ Use the direct order to quickly order a big amount of products.
- ✔ Check the status of your orders and quotes and get information on status changes by e-mail.
- ✔ Save time by using past orders.
- ✔ Easily export orders and quotes, suited to your systems.

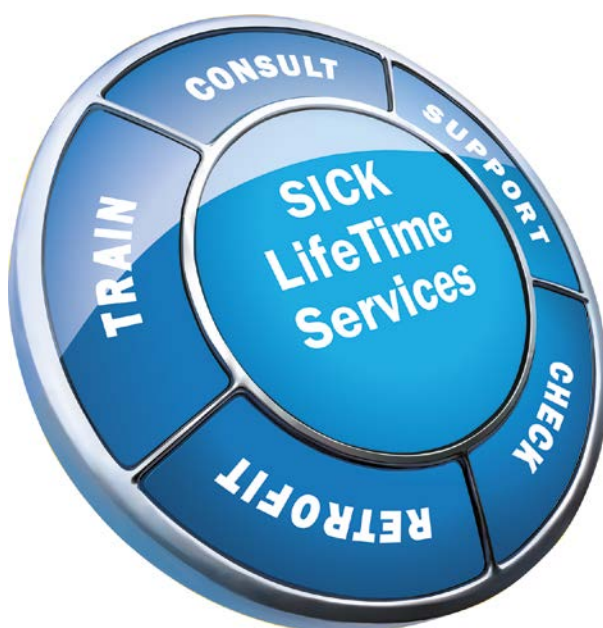

## SERVICES FOR MACHINES AND PLANTS: SICK LifeTime Services

Our comprehensive and versatile LifeTime Services are the perfect addition to the comprehensive range of products from SICK. The services range from product-independent consulting to traditional product services.



- 
**Consulting and design**  
 Safe and professional
- 
**Product and system support**  
 Reliable, fast, and on-site
- 
**Verification and optimization**  
 Safe and regularly inspected
- 
**Upgrade and retrofits**  
 Easy, safe, and economical
- 
**Training and education**  
 Practical, focused, and professional

## SICK AT A GLANCE

SICK is a leading manufacturer of intelligent sensors and sensor solutions for industrial applications. With more than 8,800 employees and over 50 subsidiaries and equity investments as well as numerous agencies worldwide, SICK is always close to its customers. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents, and preventing damage to the environment.

SICK has extensive experience in various industries and understands their processes and requirements. With intelligent sensors, SICK delivers exactly what the customers need. In application centers in Europe, Asia, and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes SICK a reliable supplier and development partner.

Comprehensive services round out the offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**That is “Sensor Intelligence.”**

### **Worldwide presence:**

Australia, Austria, Belgium, Brazil, Canada, Chile, China, Czech Republic, Denmark, Finland, France, Germany, Great Britain, Hungary, Hong Kong, India, Israel, Italy, Japan, Malaysia, Mexico, Netherlands, New Zealand, Norway, Poland, Romania, Russia, Singapore, Slovakia, Slovenia, South Africa, South Korea, Spain, Sweden, Switzerland, Taiwan, Thailand, Turkey, United Arab Emirates, USA, Vietnam.

Detailed addresses and further locations → [www.sick.com](http://www.sick.com)