



OpreX™ Data Acquisition

SMARTDAC+

Data Acquisition & Control

Paperless recorder GX/GP




SMARTDAC+™

Data Acquisition & Control

Your business environment is complex and fast changing.
You need smart and powerful systems that can adapt to your process.
SMARTDAC+ is a fresh approach to data acquisition and control,
with smart and simple touch operation as a design priority.
Measure, display and record process data with greater
levels of clarity, intelligence and accessibility.
The SMARTDAC+ concept begins with the all-new GX/GP,
an integrated I/O and recording system
with a familiar touch operator interface.
Highly adaptable, very capable and
easy to operate is the new GX/GP.

Now that's SMART.

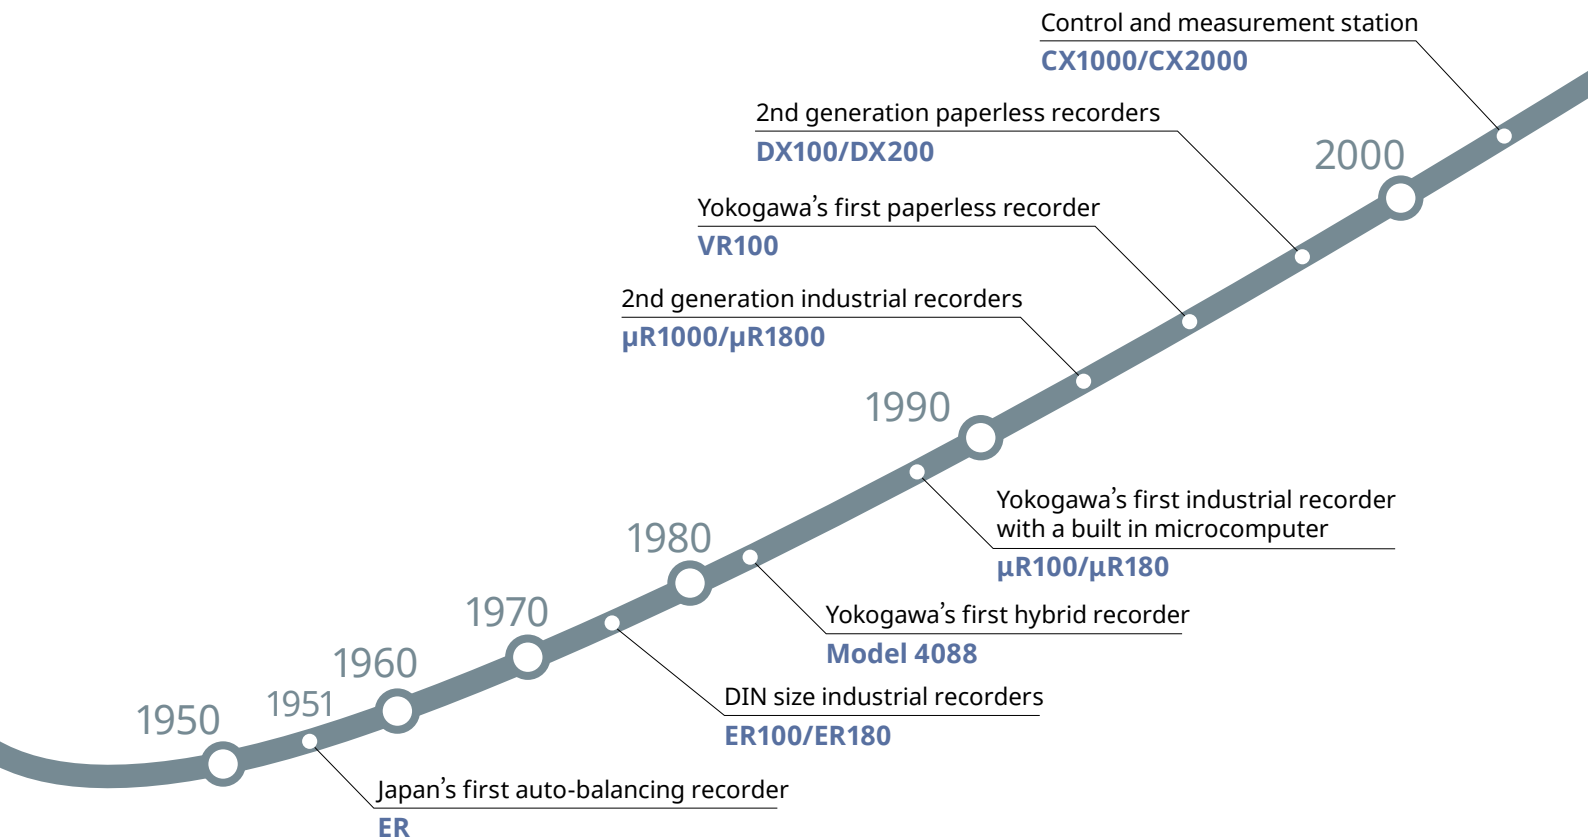



AI Equipped Paperless Recorder

GX10/GX20, GP10/GP20

2020



4th generation paperless recorders

GX10/GX20, GP10/GP20

2012

2010

3rd generation paperless recorders

DXAdvanced DX1000/DX2000

3rd generation industrial recorders

μR10000/μR20000



SMARTDAC+™

Data Acquisition & Control

What's New AI Equipped Recorder

Display & operation

- Arrange screens any way you like with the Custom Display function (option)
- Wide variety of powerful display functions
- Touch screen for greater ease of use
- Remote monitoring and setting control from a web browser



Data use

- Automatically print reports
- Powerful software for a variety of tasks including data analysis, settings, and acquisition
- Save to binary or text format
- SLMP Communication (Mitsubishi PLC)



Recording

- Supports long term multi-channel recording
- Redundancy through internal memory and external media
- Saves binary data for enhanced security (also supports plain text)



Measurement

- Inputs and outputs that support a wide range of DUTs (device under test)
- Modular construction for expandable input/output
- Multichannel measurement on up to 450 channels
- Pulse signal data acquisition with integration
- Supports high withstand voltage applications (600 V double insulation, 1000 VDC basic insulation)

Reliable technology

Proven reliability over a wide range of applications



Navigate with ease

Smart User Interface

- Observe**
 - Wide variety of display formats
 - Powerful data search functions
 - Alarm/Status indicator functions
- Interact**
 - Touch screen for intuitive operation
 - Easy-to-navigate, user-oriented design
 - Supports freehand messages



Ready for the future when you are

Smart Architecture

- Adapt**
 - Add I/O modules as needed
 - Wide ambient temperature operation
 - Locking front panel for media security
- Measure**
 - Wide range of I/O modules
 - Multichannel I/O
 - Easy-to-read screens



Data analysis made simple and mobile

Smart Functionality

- Record**
 - Draw future data
 - User defined report creation tool
 - Viewer software for data analysis
- Connect**
 - Browser-based real time monitoring
 - Centralized data management via FTP server
 - Powerful networking functions






An intuitive UI engineered for ease-of-use

Smart User Interface

Efficiently search for key data


Easily review historical data

Seamless display of historical trends—flick or drag the trend display to scroll through the data, even during measurement.

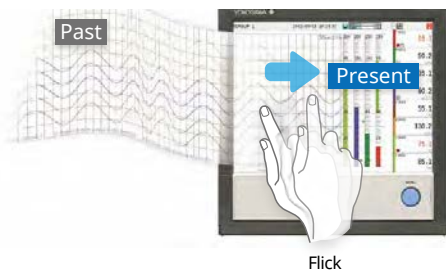

Quickly find data using calendars and summary screens


From a calendar, jump to waveforms of a specific date. From the alarm summary, jump to the waveform active during the alarm.

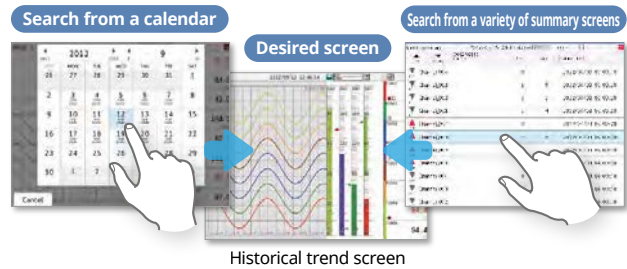

Easily check off trouble spots

Write freehand messages


Immediately clear areas of concern with a hand-written message.

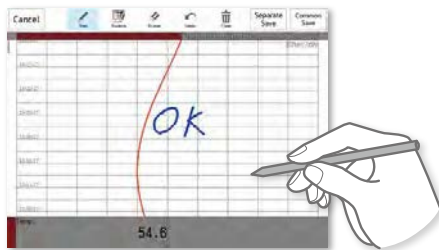

You can draw or hand-write on the waveform area using a stylus (standard accessory) or the tip of your finger. You can even select a color and line width. Alternatively, you can select from a list of preset messages.

Save and output image files


Save trend waveforms of interest or screens displayed during alarms as image (PNG) files, and print them out at the same time.

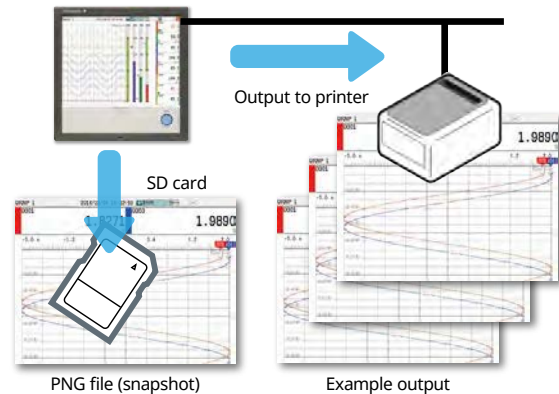

Check waveforms of concern in detail

Display digital values at any location

Move the scale to display the value corresponding to that position as a numeric value. Instantly check maximum/minimum measured values.




[Patent technology]

Ascertain long-duration trends at a glance

All historical trends display


Long-duration trends can be fitted to a single screen for easy viewing.



All historical trends display

Zoom in/out - time axis and engineering units

The time axis and engineering axis can be expanded and compressed using a simple pinch together or apart function.




Pinch apart / Pinch together

Create your own screens

Custom display (/CG option)

You can arrange display objects such as trend, numeric, and bar graphs any way you like to create monitor displays that are customized to the environment.


Start/stop pumps and perform other operations.

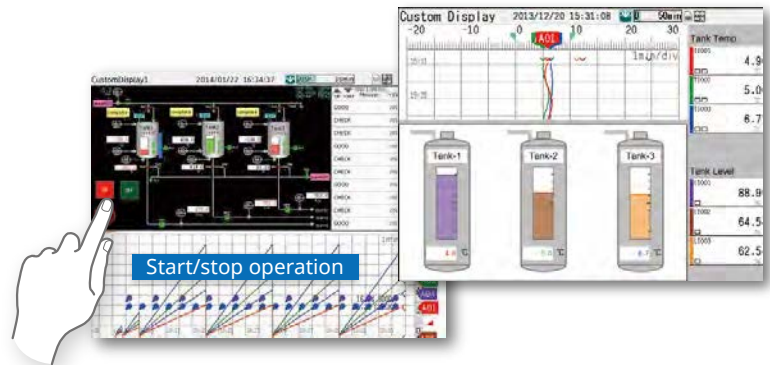

Custom display building software

DAQStudio DXA170


DAQStudio is software for creating custom displays. You can load screens you created onto the GX/GP via Ethernet or external memory media (SD/USB) and display them.

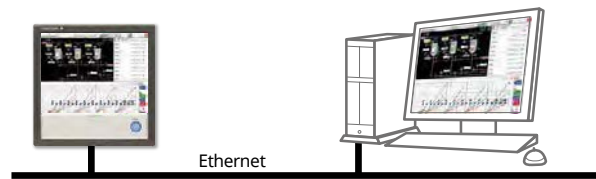


Common objects used in custom displays (DAQStudio)



Image (displays PNG files)



Digital

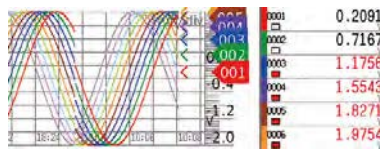

Trend



Label

| UP | DOWN | Channel | Level | Type | Alarm time |
|----|------|---------|-------|------|-------------------------|
| ▲ | | 0000.0 | 1 | H | 2014/03/13 10:12:52.000 |
| ▲ | | 0000.1 | 1 | H | 2014/03/13 10:12:37.000 |
| ▲ | | 0000.5 | 1 | H | 2014/03/13 10:12:22.000 |
| ▲ | | 0000.5 | 2 | H | 2014/03/13 10:12:07.000 |
| ▲ | | 0000.7 | 1 | H | 2014/03/13 10:11:52.000 |
| ▲ | | 0000.8 | 1 | H | 2014/03/13 10:11:37.000 |
| ▲ | | 0000.9 | 1 | H | 2014/03/13 10:11:22.000 |
| ▲ | | 001.0 | 1 | H | 2014/03/13 10:11:07.000 |
| ▼ | | 0000.1 | 1 | H | 2014/03/13 10:09:23.000 |
| ▼ | | 0000.2 | 1 | H | 2014/03/13 10:09:08.000 |


Alarm summary



Bar graph

Variety of display screens

Trend



Bar graph



Digital

Overview

Alarm summary

A screenshot of an alarm summary display showing a list of alarms.

Message summary

A screenshot of a message summary display showing a list of messages.


Memory summary

Physical quantities are displayed and recorded on a log scale.


Log scale display (/LG option)



Log scale





Displays exponents



Multi-panel display

You can select from 9 layouts, and save up to 20 configurations. (Multi panel available on the GX20/GP20 only)

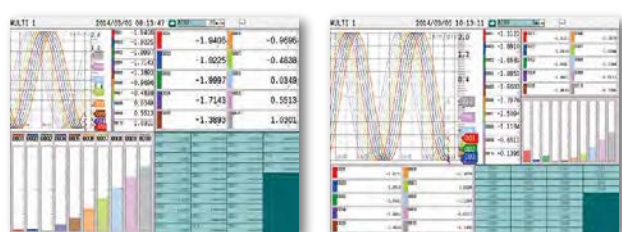



Highly flexible and scalable architecture

Smart Architecture

Modular input/output

Inputs and outputs are modular for easy expandability. The GX/GP multichannel paperless recorder main unit alone provides up to 100 channels (GX20/GP20) of measurement.

GX20/GP20

GX10/GP10



Select from a wide variety of input/output modules.



The I/O terminals are detachable.


| Model | Name | Measurement/Application | No. of channels*1 | Channels | |
|---------------|-----------------------------|--|---|------------------------|----|
| GX90XA-10-U2 | Analog input module | DC voltage, DC current (with external shunt resistor connected), thermocouple, RTD, contact (solid state relay scanner type) | 10 | 10 | |
| GX90XA-10-L1 | | DC voltage, DC current (with external shunt resistor connected), thermocouple, contact (Low withstand voltage solid state relay scanner type) | 10 | 10 | |
| GX90XA-10-T1* | | DC voltage, DC current (with external shunt resistor connected), thermocouple, contact (electromagnetic relay scanner type) | 10 | 10 | |
| GX90XA-10-C1 | | DC current (mA) (solid state relay scanner type) | 10 | 10 | |
| GX90XA-10-V1 | | DC voltage, DC current (with external shunt resistor connected), thermocouple, contact (Solid state relay scanner type), High withstand voltage (600 V double insulation, 1000 VDC basic insulation) | 10 | 10 | |
| GX90XA-04-H0* | | DC voltage, DC current (with external shunt resistor connected), thermocouple, RTD, contact (individual A/D type) | 4 | 4 | |
| GX90XA-06-R1 | | 4-wire RTD, 4-wire resistance (solid state relay scanner type) | 6 | 6 | |
| GX90YA* | | Analog output module | Current output | 4 | 4 |
| GX90XD* | | Digital input module | Remote control input or operation recording | 16 | 16 |
| GX90YD* | | Digital output module | Alarm output | 6 | 6 |
| GX90WD* | Digital input/output module | Remote control input or operation recording/alarm output | 14 | DI:8/DO:6 | |
| GX90XP | Pulse input Module | Pulse signal data acquisition, integral count | 10 | 10 | |
| GX90UT* | PID control module | PID control (2 loop) | 26 | AI:2/AO:2 DI:8/DO:8 | |

* = Mounting restrictions apply. See the general specifications for details.

*1: Large memory model required if the total number of channels installed exceeds 100.

Expandable to up to 450 channels (real actual input)

Supports up to 450 channels of measurement. Note that if MATH and communication channels are included, the GX20/GP20 large memory type can record on up to 1000 channels. The GX/GP main unit and expandable I/O can both use the same input/output modules.

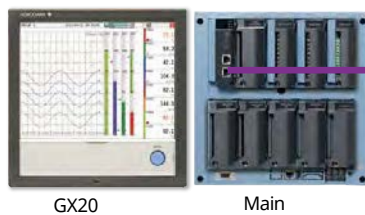

LAN cable (CAT5 or later)

Chain up to 6 units




The maximum distance between units is 100 m. You connect directly with a LAN cable without connecting through a hub or repeater.

* You can also connect subunits of the GM Data Acquisition System.

Reduce wiring with distributed installation

When the recorder is installed offsite (away from the DUT), you can place the expandable I/O at the site and monitor data without the need for long-distance wiring of thermocouples and other sensors.

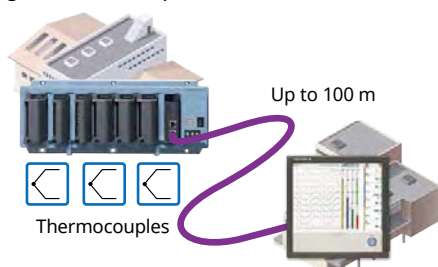

Up to 100 m




Thermocouples

| Model | Type | Max. channels | Number of channels by configuration | |
|-----------|--------------|---------------|-------------------------------------|-------|
| GX10/GP10 | Standard | 100ch | Main unit only | 0-30 |
| | | | Main + expandable I/O | 0-100 |
| GX20/GP20 | Standard | 100ch | Main unit only | 0-100 |
| | | | Main + expandable I/O | 0-100 |
| | Large memory | 450ch | Main unit only | 0-100 |
| | | | Main + expandable I/O | 0-450 |

The number of channels is for analog input only.

Component Names

GX20

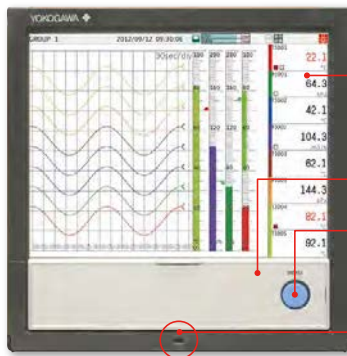

LCD screen
Displays operating screens such as trend graphs, and setting screens.

Operation panel

MENU key
Simply press the MENU key to display a menu for access to a variety of screens.

Front panel door lock mechanism

GP20




Handle

The START/STOP key can be used when the operation panel is closed.

Feet

With front panel door open

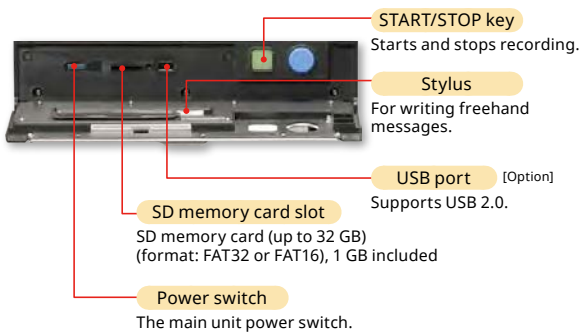


START/STOP key
Starts and stops recording.

Stylus
For writing freehand messages.

USB port [Option]
Supports USB 2.0.

SD memory card slot
SD memory card (up to 32 GB)
(format: FAT32 or FAT16), 1 GB included

Power switch
The main unit power switch.

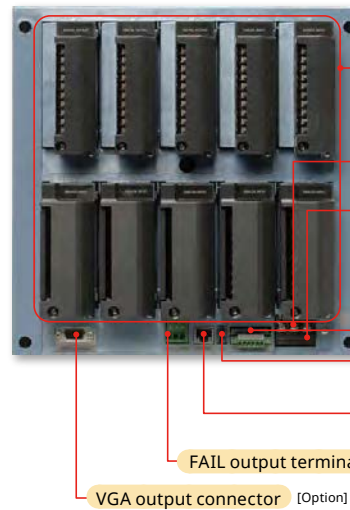

Input/output module slots

Power inlet
(GP10/GP20)

Power and protective ground

Serial communications port [Option]
Terminal for RS-422/485 or RS-232 communications.


USB port [Option]
Supports USB 2.0.

Ethernet Port
A 10Base-T/100Base-TX port. [Option]

FAIL output terminal [Option]
VGA output connector [Option]
External monitor connector.

Connect a mouse and keyboard for a "PC feel"


USB interface (/UH option)



- Keyboard
- Memory
- Mouse
- Bar code reader



Runs on DC12 V power for in-vehicle data acquisition.

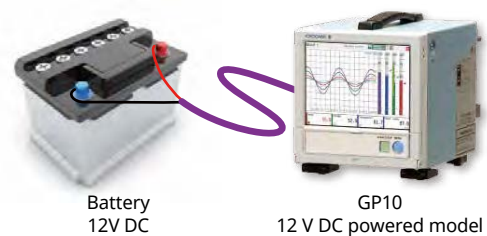

Battery
12V DC

GP10
12 V DC powered model

Choose by mounting design and application



Cover color
(/BC option)(GX)



Portable models
(GP10/GP20)

Easy-to-read display

- GX20/GP20:12.1" TFT color LCD, 800 x 600 dots
- GX10/GP10:5.7" TFT color LCD, 640 x 480 dots

GX10



GP10





A full range of network functions and software Smart Functionality

New

Draw predicted future data with AI

AI comes standard on the GX/GP.

No complicated settings. Simply register channels, and you're ready to draw future measured data on those channels.

Future Pen

Use acquired data to predict future data, and display predicted future waveforms along with real time data on the trend monitor.

Predicted future waveforms help you identify and deal with likely problems as soon as possible.

- Max. channels: 10
- Shortest recording interval: 1 sec.
- Prediction range: Recording interval x 60 points

* Effective for relatively slowly fluctuating data. Not suitable for rapidly fluctuating data.

* Certain restrictions apply with the future pen function. See the general specifications for details.



Future alarms

You can set future alarms based on future data predicted by the future pen.

You can check future alarm information in the Future Alarm Summary screen.

Also, when a future alarm occurs, notification can be sent by external (digital) output or email.


Because the future alarm information also includes the predicted alarm time, you can also identify the urgency.

The future alarm values use the existing alarm functions.

Alarm types: upper limit, lower limit,

When selecting difference between channels computation for a range: difference upper limit, difference lower limit


| Channel | Level | Unit | Start predicted time | Time remaining |
|----------|-------|------|----------------------|----------------|
| Pressure | 1 | H | 2020/04/02 02:04:00 | 05h:52m |
| Humidity | 2 | L | 2020/04/02 04:12:00 | 07h:59m |

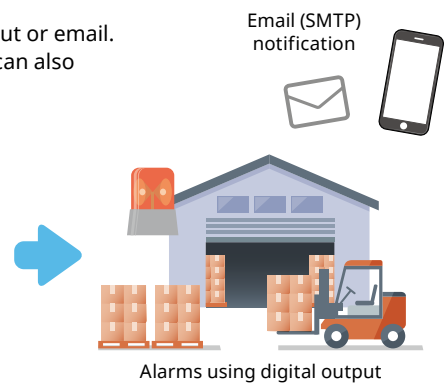

Dedicated software (free download) is available for loading waveforms and GX/GP settings

Universal viewer

Data files saved on the GX/GP can be viewed and printed. You can perform statistical computation over an area and export to ASCII, Excel, or other formats.

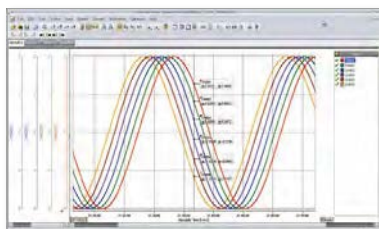


Data converted to an ASCII file

```

Date: 2020/04/02 09:00:00
Channel: 1
Unit: hPa
Level: 1015.7
Time: 09:00:00
...
    
```

Offline setting software


Save settings or transfer them to the GX/GP.

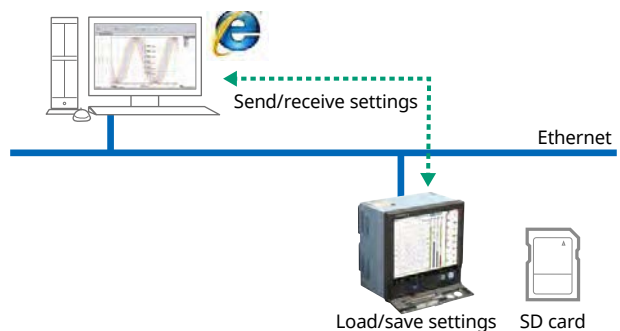

Real time remote monitoring from a web browser

Through a Web browser you can monitor the GX/GP in real time and change settings. You can easily build a seamless, low-cost remote monitoring system with no additional software.

Real time monitoring screen

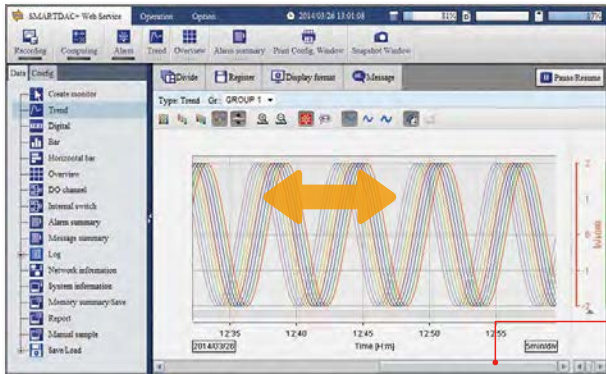

You can view monitor screens in real time that are identical to the trends, digital, and other displays on the GX/GP main unit.

Overview



Bar graph

Digital

With the scroll bar, you can seamlessly scroll between past and current trends. When the sampling interval is 1 second, the instrument displays 1 hour's worth of historical trends.

Enter settings online with a web browser




Ethernet

The setting screen lets you copy AI channel settings and other information to Excel for editing. You can reimport the data into the setting screen after editing.

| CH | Type | Range | Span Lower | Span Upper | Default |
|------|------|-------|------------|------------|---------|
| 0001 | Valt | 2V | -2.0000 | 2.0000 | Off |
| 0002 | Valt | 2V | -2.0000 | 2.0000 | Off |
| 0003 | Valt | 2V | -2.0000 | 2.0000 | Off |
| 0004 | Valt | 2V | -2.0000 | 2.0000 | Off |
| 0005 | Valt | 2V | -2.0000 | 2.0000 | Off |
| 0006 | Valt | 2V | -2.0000 | 2.0000 | Off |
| 0007 | Valt | 2V | -2.0000 | 2.0000 | Off |
| 0008 | Valt | 2V | -2.0000 | 2.0000 | Off |
| 0009 | Valt | 2V | -2.0000 | 2.0000 | Off |
| 0010 | Valt | 2V | -2.0000 | 2.0000 | Off |

Mobile Web

Enables monitoring from a tablet

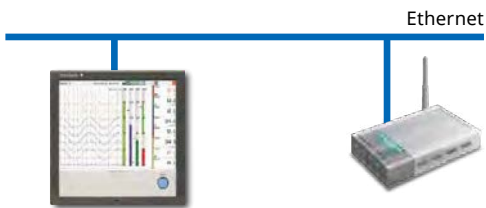



Enables monitoring via Wi-Fi



Record data in separate files per equipment set

Multi-batch Function (/BT option)

Recorder pre-defined channel groups to separate data files with independent start and stop control. Up to 12 independent batches can be created.

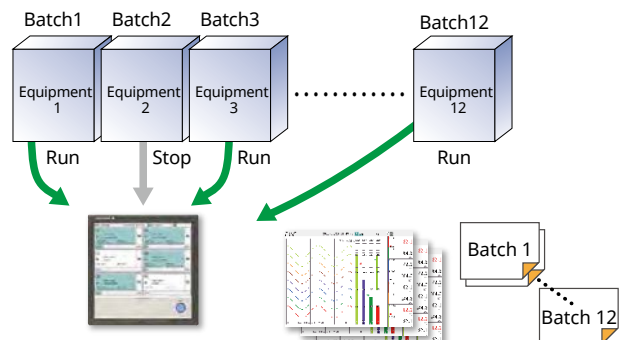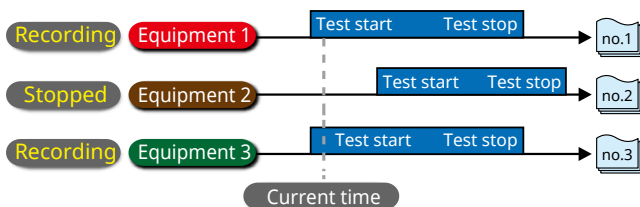

Supports the aerospace industry's AMS2750/NADCAP and the automotive industry's CQI-9 for heat treatment applications


Calibration correction schedule control function (/AH option)

Schedule management for periodically executing calibration correction configuration and the like. The correction factor can be set separately for unit and sensor dependency. For AMS2750, we offer TUS software* that can easily create TUS (temperature distribution test) reports.

* For information on TUS software, contact your Yokogawa representative.

| | |
|---|---|
| Furnace 1 Calibration Time until due date: 63 days | Furnace 4 Calibration Time until due date: 7 days |
| Furnace 2 Calibration Time until due date: 70 days | Furnace 5 Calibration Time until due date: 28 days |
| Furnace 3 Calibration Time until due date: 0 days | Furnace 6 Calibration Time until due date: 35 days |

Calibration Reminder Screen



Message to prompt calibration


Calibration schedule setting

PID control function

Control function

Enables PID and program control

- PID control module
2-loops per module, up to 20 loops per system
- Setpoint program control function (/PG option)
Up to 99 patterns




Proprietary A/D



GX90UT PID control module

Remote operation and monitoring

The web application enables remote operation and monitoring from a browser.




With the Web Server function, simply access the GX/GP from a web browser on a PC for easy operation and monitoring of control loops.



Built in control screens and display

Various pre-configured control screens and display are available.

Run programs (/PG)



Tuning




Control overview



Control alarm summary




Control groups

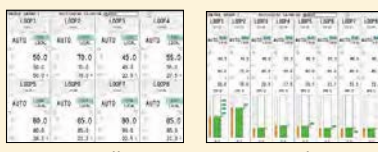


Controller

Face plate



Control operation summary




Select programs

Application examples


Industrial furnace

- Ideal for centralized control of multiple loops
- Modular structure makes for easy maintenance of individual loops

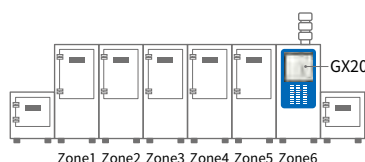


Utility equipment

- Simplifies loop control and remote monitoring of utility equipment
- Readily scalable for additional loops

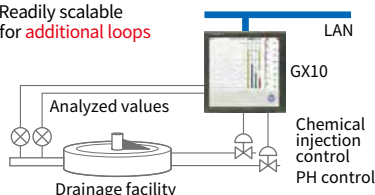

Engine endurance test bench

- Measures evaluation data while generating test patterns

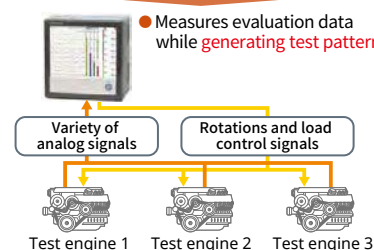


High speed measurement (down to 1 ms)

Yokogawa's proprietary A/D converter allows the high speed module to measure data points as fast 1ms.

- High speed (1 ms) measurement*
- Proprietary A/D converter

* With 1ch per module.
At 2 ms, 2 ch per module, and at 5 ms or more, all 4 ch per module.



GX90XA-04-H0
Analog input module (high speed AI)

Max. channels

| Model | Scan interval | | |
|---------------|---------------|------|------|
| | 1ms | 5ms | 10ms |
| GX/GP10 | 1ch | 5ch | 10ch |
| GX20-1/GP20-1 | 1ch | 5ch | 10ch |
| GX20-2/GP20-2 | 5ch | 25ch | 40ch |


Dual interval measurement with two different scan intervals

Users have the ability to choose two different scan intervals on a single GX/GP system. This allows users the flexibility to measure various types of inputs with two different scan intervals in a single system. For example, this provides for efficient, simultaneous measurement of signals with slow fluctuations such as temperature, and fast-changing signals such as pressure and vibration. Modules can be assigned to measurement groups.

2 measurement groups

Easily switch groups

Superimpose data on Universal Viewer



- Measurement group 1
- Measurement group 2

The figure above shows 2 measurement groups by color.

Channels for measurement group 1




Simply swipe to switch measurement groups.

Channels for measurement group 2



Measurement group 1



Measurement group 2



Superimposed



Universal Viewer

Application examples


Acquire temperature and vibration data from power plant turbines

- Monitoring and recording of alarms when abnormal temperature or vibration are detected
- At 5 ms sampling, reliably detect abnormalities
- Dual interval multipoint measurement




Measures LCD projector overheating

- Evaluates the rise in temperature of parts near the projector lamp, and the drop in temperature after powering OFF
- At 10 to 1 ms sampling, record steep temperature changes in detail



Car battery charge/discharge test


- Measures transient current during charging and discharging
- Sampling requirement: 1 ms

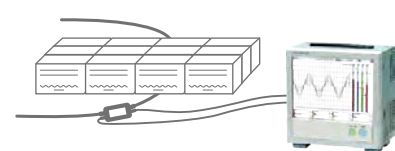

MATH (including reports), and event actions


MATH function (/MT option)

Supports various kinds of math computation, including basic math and functions (square root, logarithms, trigonometry). Write formulas using variables for measured or computed data and save or display the results—this saves time and effort on post-processing. Create hourly, daily, monthly, and other reports with the Report function.

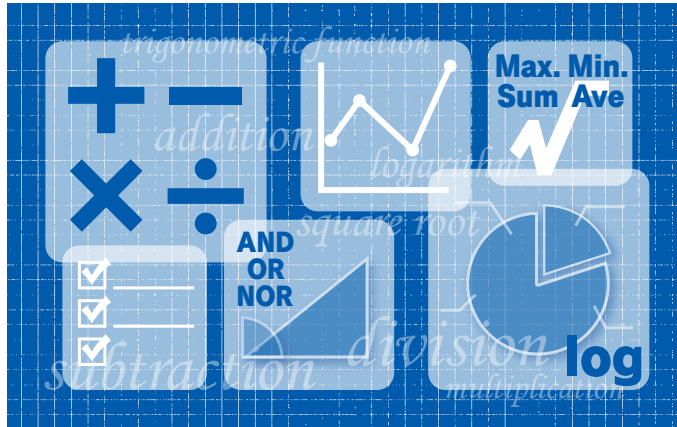


Event actions

Ability to assign actions tied to specific events during the operation of the data acquisition station.

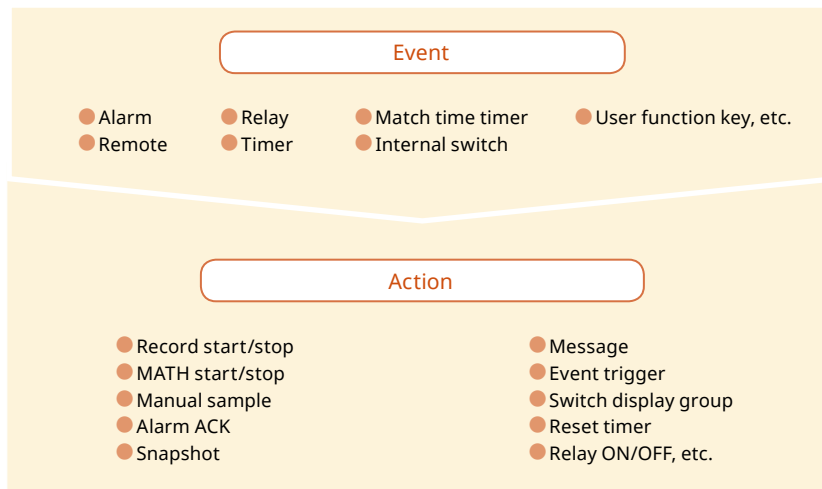

Report creation and network functions (/MT option)

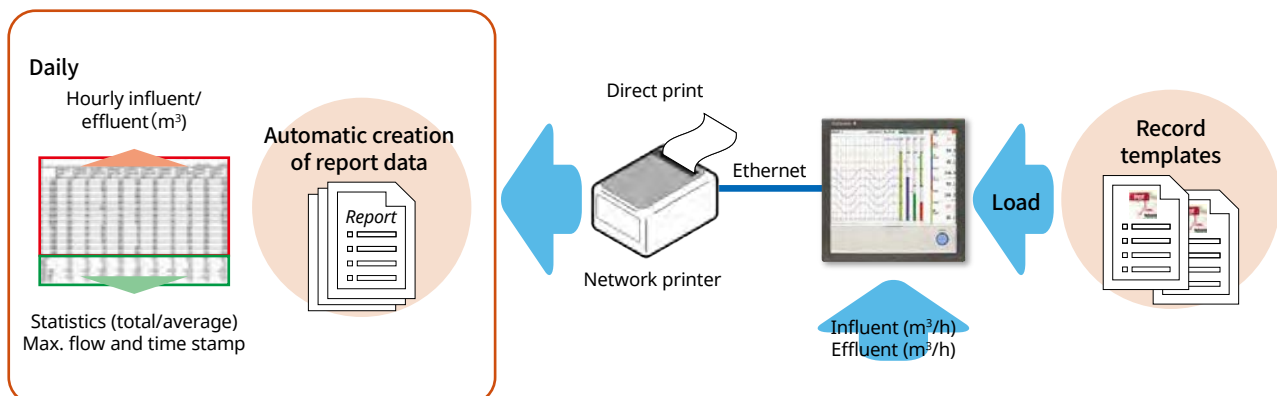




Provides a variety of convenient networking functions

Networking

Modbus/TCP and Modbus/RTU Communications

GX/GP supports Modbus TCP/IP client and server modes for Ethernet communications and Modbus RTU master and slave modes for optional serial communications.


Modbus/TCP (Ethernet connection), Modbus/RTU (RS-422/485 connection)

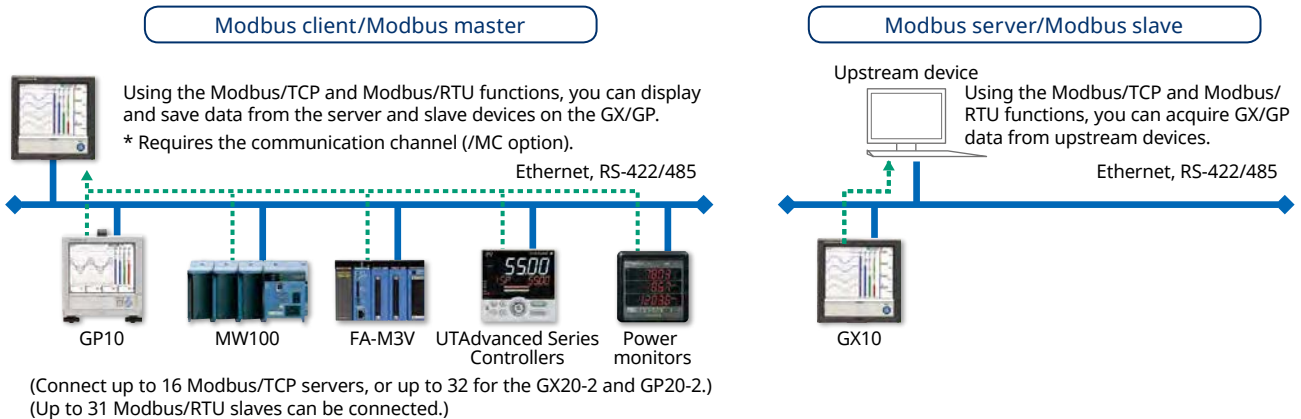

EtherNet/IP Function (/E1 option)

GX/GP supports EtherNet/IP server functions. You can access GX/GP from PLCs or other devices and load measurement/MATH channels or write* to communication input channels (GX10/GP10: max. 50 ch, GX20-1/GP20-1: max. 300 ch, GX20-2/GP20-2: max. 500 ch).


* Communication channel function (/MC option) is required.

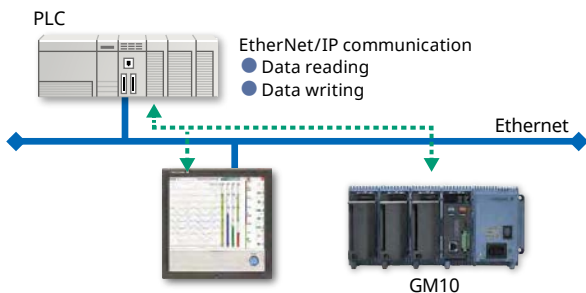

CC-Link family SLMP communication (/E4 option)

Protocol function that enables connection from a GX/GP to Mitsubishi Electric PLCs without sequencer programs. You can run the GX/GP as an SLMP client, enabling writing of GX/GP measured data to the PLC and writing of PLC data to communication channels.*

*Requires the communication channel function (/MC option).

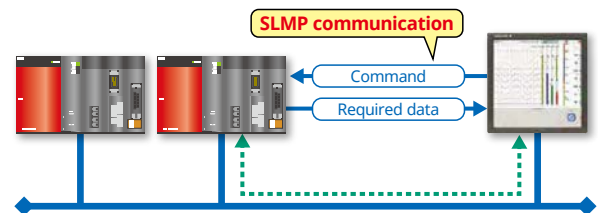

Powerful tool for instrument performance evaluation testing (/E2 and /MC options)


Highly precise measured data from power measuring instruments (WT series power analyzers) can be acquired without loss of fidelity on the GX/GP, and recorded and displayed alongside the GX/GP's own measured data. This is ideal for performance evaluation testing because you can record instrument power consumption, temperature, and other phenomena simultaneously.

Models that can be connected

Yokogawa Meters & Instruments Corp., WT series power analyzers, WT300/WT300E (command mode WT300), WT500, WT1800/WT1800E (command type WT1800)


Max. no. of connections

8 (GX10/GP10), 16 (GX20/GP20)

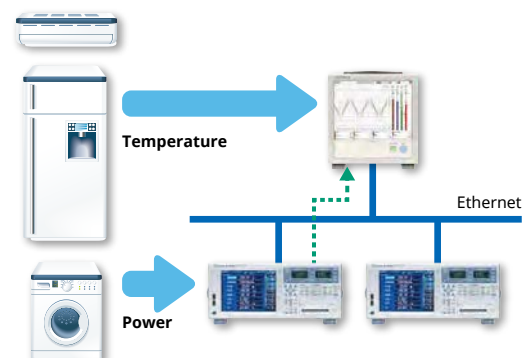

OPC-UA Server (/E3 option)


Data acquired by the GX/GP can be accessed through Ethernet communication from a host system (OPCUA client). Writing from an upstream system to a GX/GP communication channel requires the communication channel function (/MC option).

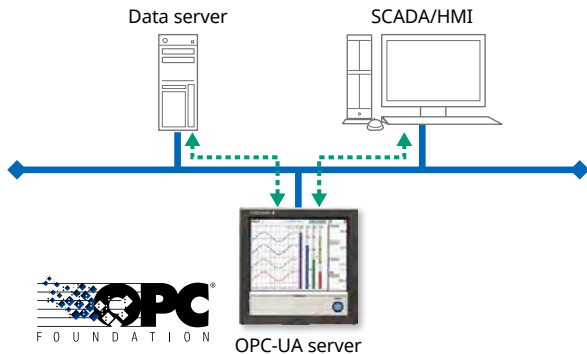

DARWIN-compatible communication



The GX/GP supports DARWIN communication commands. Use your current DARWIN communication programs as-is on the GX/GP.*

* See your dealer or nearest Yokogawa representative for details.

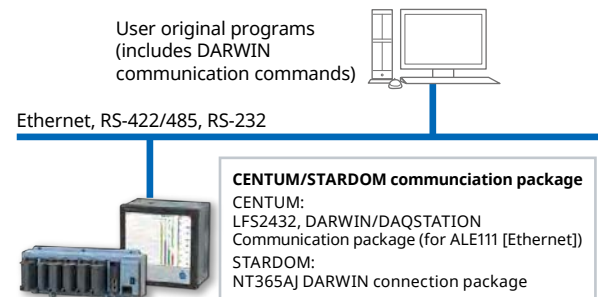

FTP-based file transfer

The FTP client/server functions allow you to easily share and manage data from a centralized file server.

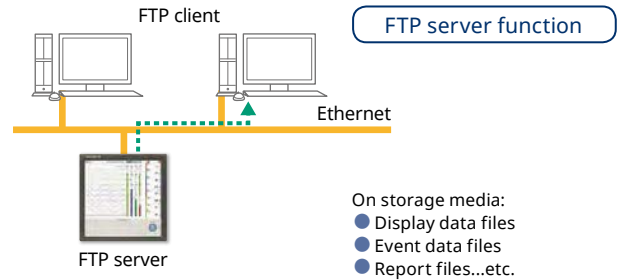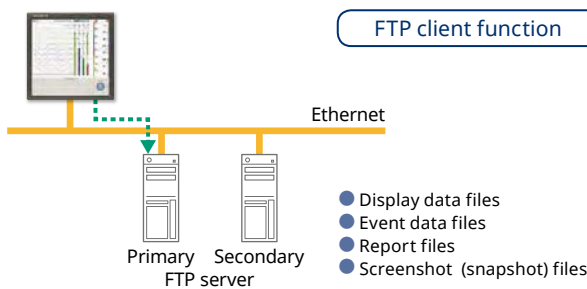


E-mail messaging function

The GX/GP can send a variety of informative e-mail messages that include alarm notification reports, periodic instantaneous data values, scheduled report data and other information.


Sending e-mail using an existing mail system

In this type of setup, e-mail messages are sent through an existing mail server (SMTP server).

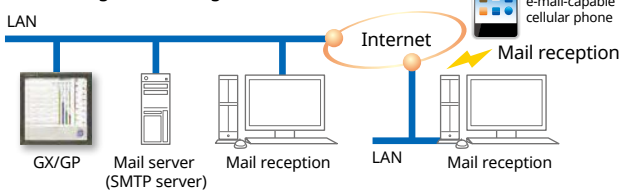


Automatic network setup (DHCP) function

Using Dynamic Host Configuration Protocol (DHCP), the GX/GP can automatically acquire the settings it needs (IP address) for network communications from a DHCP server. This makes it easier than ever to install the unit on a plant network.

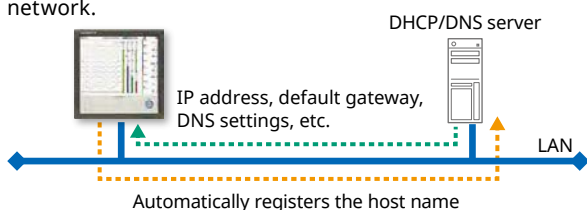

Time synchronization with network time servers

GX/GP uses SNTP protocol in client mode to acquire time information from a network time-server. This function allows any number of GX/GP units within a facility to have precisely synchronized time; all units will record data with coordinated date and time stamp information. In addition, GX/GP can function as a server, providing time data to other SNTP client units on the network.

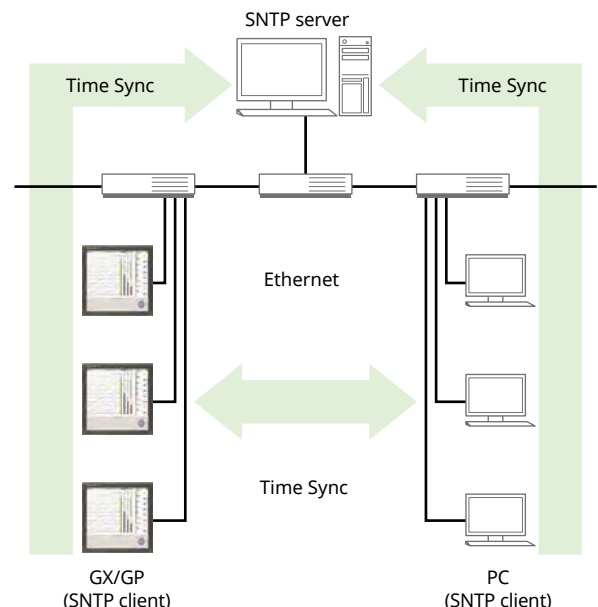




Rock-solid hardware and highly secure

Reliability and durability

Be confident that recorded data is saved

Measured and calculated data is continuously saved to secure, internal non-volatile memory. At manual or scheduled intervals, the files in memory are copied to the removable media. In addition, the files can be copied and archived to an FTP server.

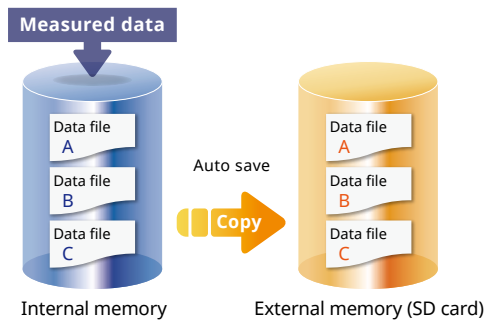

Because of the inherent reliability and security of non-volatile memory, the possibility of losing data under any operating condition or power failure event is extremely small.

High Capacity Internal Memory

Even longer recording durations, and multichannel recording.

Display data file sample time

Measurement CH = 30 channels. Math CH = 0 channels.

| | |
|-----------------------------|-------------------|
| Internal Memory | 500 MB |
| Display update (minute/div) | 30 minutes |
| Sampling period (s) | 60 s |
| Total sample time | Approx. 2.5 years |

Event data file sample time

Measurement CH = 30 channels. Math CH = 0 channels.

| | |
|---------------------|------------------|
| Internal Memory | 500 MB |
| Sampling period (s) | 1 s |
| Total sample time | Approx. 1 months |

Security enhancements

Safely sends and receives customer data.

SSL support function

- FTP client
- SMTP client
- FTP server
- HTTP server

Digital signatures


- Add electronic signatures to records (PDF)




SSL: An encryption protocol for data sent over TCP/IP networks.

Select file formats according to your application

For increased security, measured data can be saved in binary format. This format is very difficult to decipher or modify in traditional text editors or other programs. To enable easy and direct opening of the data in text editors or spreadsheet programs, choose text format. This allows you to work with your measurement data without dedicated software.



ASCII data display



Binary data display

21 CFR Part 11 support (IAS option)

With the advanced security function, it supports US FDA 21 CFR Part 11 (regulations on electronic recording and electronic signatures) and the Japanese Ministry of Health, Labor, and Welfare's ER/ES guidelines. It also supports PIC/S and the ALCOA data integrity mentioned by the WHO, MHRA, and FDA. It gives you access to a credential-based login function, electronic signatures, audit trails, an anti-tampering function, an Active Directory-based password management function, a sign-in function, and other security features.



FDA 21 CFR PART 11

Front panel door lock



The front panel door can be locked to prevent mishandling of the power switch or external media.

Analog front end module

A proprietary A/D converter delivers high speed, high precision data acquisition. (High-speed AI, PID Control module)



Reliable dust- and splash-proof construction

Dust and splashproof front panel (Complies with IEC529-IP65 and NEMA No. 250 TYPE 4*)


With its IEC529-IP65 compliant front panel, the GX is ready for use in harsh environments.

* Except the external icing test




High environmental worthiness for use in most any setting

The protective sheets on the touch panel display have a special coating on the front and back to prevent damage from scratches, chemicals, and solvents while maintaining a high display clarity and resistance to light interference.

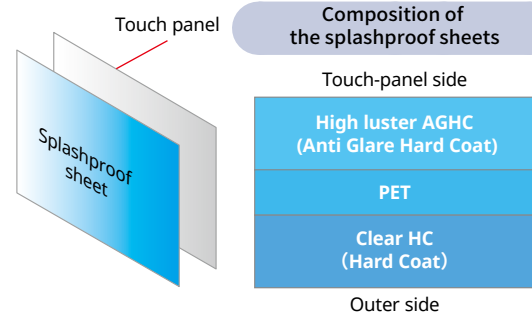

Multitouch operation even with gloves on


Traditional resistive touch screens can detect only one touch point. The built in controller and algorithm of the GX/GP can detect two touch points, allowing intuitive pan and zoom functions during trend monitoring—a first among paperless recorders.

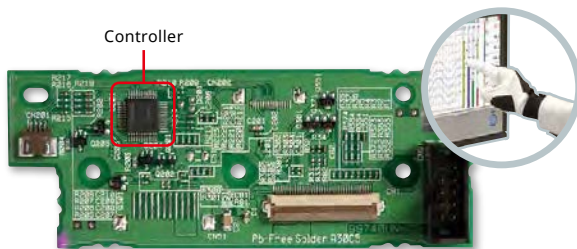

Heat dissipating construction

The GX/GP was built for heat dissipation to ensure an even temperature distribution between module terminals.

Heat analysis result

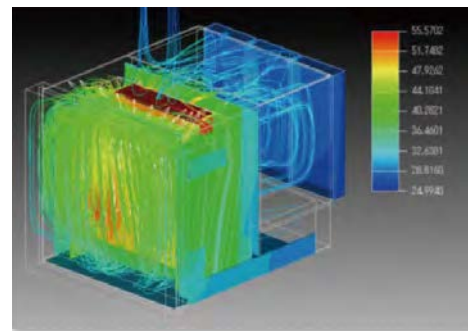

Actual values support high precision measurement

The measuring accuracies noted in the general specifications have a margin of error that takes into account the product's components and the equipment used for adjustment and testing. However, the actual values calculated from the accuracy testing data upon shipment of the instrument from the factory are as follows.

| | Input type | Measuring accuracy* ¹ (typical value* ²) |
|------------------|--|---|
| DCV | 20mV | ± (0.01% of rdg + 5 μV) |
| | 60mV | ± (0.01% of rdg + 5 μV) |
| | 6V (1-5 V) | ± (0.01% of rdg + 2 mV) |
| TC* ³ | R, S | ± 1.1°C |
| | B | ± 1.5°C |
| | K (-200.0 to 1370.0 °C) | 0.0 to 1370.0°C : ± (0.01% of rdg + 0.2°C) -200.0 to 0.0°C : ± (0.15% of rdg + 0.2°C) |
| | K (-200.0 to 500.0 °C) | 0.0 to 500.0°C : ± 0.2°C -200.0 to 0.0°C : ± (0.15% of rdg + 0.2°C) |
| | J | 0.0 to 1100.0°C : ± 0.2°C -200.0 to 0.0°C : ± (0.10% of rdg + 0.2°C) |
| | T | 0.0 to 400.0°C : ± 0.2°C -200.0 to 0.0°C : ± (0.10% of rdg + 0.2°C) |
| RTD | N | 0.0 to 1300.0°C : ± (0.01% of rdg + 0.2°C) -200.0 to 0.0°C : ± (0.22% of rdg + 0.2°C) |
| | Pt100 (-200.0 to 850.0 °C) | ± (0.02% of rdg + 0.2°C) |
| | Pt100 (high resolution) (-150.00 to 150.00 °C) | ± (0.02% of rdg + 0.16°C) |

*¹ Applies to GX90XA-10-U2, A/D integration time 16.67 ms or more, General operating conditions: 23 ± 2 °C, 55 ± 10% RH, supply voltage 90–132, 180–264 V AC, power frequency within 50/60 Hz ± 1%, warm-up of 30 minutes or more, no vibrations or other hindrances to performance.

*² For the measuring accuracy (guaranteed), see the module's general specifications (GS 04L53B01-01EN).

*³ These values do not include the reference junction compensation accuracy.



| Model | | GX20 | GP20 | GX10 | GP10 |
|---------------------------------|-------------------|---|----------------------|--|----------------------|
| Construction | | Vertical panel mount | Portable | Vertical panel mount | Portable |
| | Panel thickness | 2 to 26 mm | | 2 to 26 mm | |
| Display | | 12.1" TFT color LCD (800 × 600 dots) | | 5.7" TFT color LCD (640 × 480 dots) | |
| Touch screen | | 4 wire resistive touch screen, 2-point touch detection | | | |
| Max. no. of connectable modules | | 10 (When mounted on expansion module: 9) | | 3 (When mounted on expansion module: 2) | |
| | | * The maximum number of connectable modules is limited by the maximum number of I/O channels, and differs depending on the types and combinations of modules. | | | |
| Analog input channels | | Standard: 100, Large memory: 450 (with expansion unit) | | Standard: 30, 100 (with expansion unit) | |
| No. of mathematical channels | | GX20-1, GP20-1: 100, GX20-2, GP20-2: 200 | | 50 | |
| No. of communication channels | | Standard: 300, Large memory: 500 | | 50 | |
| Internal memory (flash memory) | | Standard: 500 MB, Large memory: 1.2 GB | | 500 MB | |
| External storage media | | SD memory card (up to 32 GB) (format: FAT32 or FAT16), 1 GB included USB interface (/UH option): USB 2.0 compliant (external storage media: USB flash memory) (Keyboard/mouse: HID Class Ver. 1.1 compliant) | | | |
| Communication functions | | Ethernet (10BASE-T/100BASE-TX), IEEE802.3 compliant (Ethernet frame type: DIX) Connecting configuration: Cascade max. 4 level (10BASE-T), max. 2 level (100BASE-TX), segment length: Max. 100 m E-mail inform function (E-mail client), FTP client function, FTP server function, Web server function, SNTP client function, SNTP server function, DHCP client function Modbus/TCP (client/server functions) *MC option is required. | | | |
| Options | | Serial communications (/C2: RS-232, /C3: RS-422 or RS-485), Modbus/RTU (master/slave functions) EtherNet/IP communication (PLC communication protocol) (/E1), WT communication (/E2), OPC-UA server (/E3), SLMP communication (Mitsubishi PLC) (/E4) | | | |
| Other functions | | Security functions: Key lock function, login function, Clock functions: With calendar function, accuracy: ± 5 ppm (0 to 50°C), LCD saver function | | | |
| Rated supply voltage | | 100 to 240 VAC (allowable power supply voltage range: 90 to 132 VAC, 180 to 264 VAC) 12 VDC (allowable power supply voltage range: 10 to 20 VDC, only for a GP10 of power supply voltage code "2") | | | |
| Rated supply frequency | | 50/60 Hz | | | |
| Power consumption | | Max. 90 VA (100 VAC), max. 110 VA (240 VAC) | | Max. 45 VA (100 VAC), max. 60 VA (240 VAC) | |
| Insulation resistance | | Between the Ethernet, RS-422/485, and each insulation terminal and earth: 20 MΩ or greater (at 500 VDC) | | | |
| Withstand voltage | | Between the power terminal and earth: 3000 V AC (50/60 Hz) for one minute | | | |
| External dimensions (W × H × D) | Main Unit | 288 × 288 × 169 (mm) | 288 × 318 × 197 (mm) | 144 × 144 × 174 (mm) | 144 × 168 × 197 (mm) |
| | Including modules | 288 × 288 × 220 (mm) | 288 × 318 × 248 (mm) | 144 × 144 × 225 (mm) | 144 × 168 × 248 (mm) |
| Weight (main unit only) | | Approx. 6.0 kg | Approx. 5.4 kg | Approx. 2.1 kg | Approx. 1.9 kg |

Analog input module (Universal input module)

| Model | GX90XA | | | | | | | | | | | | |
|------------------------------|--|--|-----|-----|------|------------|------------------|--|-------|-------|----|----|----|
| Input type (Inputs: 4/6/10) | DC voltage ^{*1} , standardized signal ^{*1} , thermocouple ^{*1} , RTD ^{*2} , DI ^{*1} , DC current (with external shunt resistor) ^{*1} , DC current ^{*3} , resistance ^{*4} | | | | | | | | | | | | |
| | DC voltage | 20 mV, 60 mV, 200 mV, 1 V, 2 V, 6 V, 20 V, 50 V, 100 V ^{*5} | | | | | RTD | Pt100, JPt100, Cu10 GE, Cu10 L&N, Cu10 WEED, Cu10 BAILEY, Cu10 (20°C) α=0.00392, Cu10 (20°C) α=0.00393, Cu25 (0°C) α=0.00425, Cu53 (0°C) α=0.00426035, Cu100 (0°C) α=0.00425, J263B, Ni100 (SAMA), Ni100 (DIN), Ni120, Pt25, Pt50, Pt200 WEED, Cu10 GOST, Cu50 GOST, Cu100 GOST, Pt46 GOST, Pt100 GOST, PT500 ^{*4} , PT1000 ^{*4} | | | | | |
| | Standard signal | 0.4-2 V, 1-5 V | | | | | | | | | | | |
| | Resistance | 20, 200, 2000 Ω | | | | | DI | Level, Contact | | | | | |
| Thermocouple | R, S, B, K, E, J, T, N, W, L, U, W97Re3-W75Re25, KpvsAu7Fe, Platinel 2, PR20-40, NiNiMo, W/WRe26, N(AWG14), XK GOST | | | | | DC current | 0-20 mA, 4-20 mA | | | | | | |
| Scan intervals | 1/2/5/10/20/50/100/200/500ms, 1/2/5s | | | | | | | | | | | | |
| | Scan interval by type | | | | | | | | | | | | |
| | Suffix code | Scan interval | | | | | | | | | | | |
| | | 1ms | 2ms | 5ms | 10ms | 20ms | 50ms | 100ms | 200ms | 500ms | 1s | 2s | 5s |
| | -U2 | — | — | — | — | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| | -C1 | — | — | — | — | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| | -L1 | — | — | — | — | — | — | — | — | ○ | ○ | ○ | ○ |
| | -T1 | — | — | — | — | — | — | — | — | — | ○ | ○ | ○ |
| | -H0 | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| | -R1 | — | — | — | — | — | — | ○ | ○ | ○ | ○ | ○ | ○ |
| -V1 | — | — | — | — | — | — | ○ | ○ | ○ | ○ | ○ | ○ | |
| Power supply and consumption | Supplied from main unit, power consumption: 2 W or less | | | | | | | | | | | | |
| Insulation resistance | Between input circuits and internal circuitry : 20 MΩ or greater (at 500 V DC) | | | | | | | | | | | | |
| Withstand voltage | Between the input circuits and the internal circuitry: 3000 VAC for one minute (current input type and low withstand voltage type: 1500 VAC for one minute, high withstand voltage type: 3700 V AC for one minute) Between analog input channels: 1000 V AC for one minute (excluding b terminals for universal input type) (low withstand voltage type: 400 VAC for one minute, high speed universal type: 3000 V AC for one minute) | | | | | | | | | | | | |
| Terminal types | M3 screw terminals or clamp terminals | | | | | | | | | | | | |
| Weight | Approx. 0.3 kg | | | | | | | | | | | | |

*1 Cannot be set for the current input type (type suffix code: -C1) or 4-wire RTD/resistance type (type suffix code: -R1).

*2 Cannot be set for the current input type (type suffix code: -C1), electromagnetic relay type (type suffix code: -T1), low withstand voltage type (type suffix code: -L1) or high withstand voltage type (type suffix code: -V1).

*3 Can only be set with current input type (type suffix code: -C1).

*4 Can only be set with 4-wire RTD/resistance type (type suffix code: -R1).

*5 Can only be set with high speed universal type (type suffix code: -H0).

Analog output module

| Model | GX90YA |
|------------------------------|--|
| Output type (outputs: 4) | Transmission output, manual output |
| Range | 4–20 mA or 0–20 mA |
| Output update interval | 100 msec (shortest) |
| Load resistance | 600 Ω or less |
| Resolution | 0.002% |
| Power supply and consumption | Supplied from main unit, power consumption: 3W or less |
| Insulation resistance | Between output circuits and internal circuitry: 20 MΩ (at 500 VDC) |
| | Between output channel terminals: 500 VDC, 20 MΩ or greater |
| Withstand voltage | Between output circuits and internal circuitry: 1500 AC for one minute |
| | Between output circuits: 500 VAC for one minute |
| Terminal type | M3 screw terminals or clamp terminals |
| Weight | Approximately 0.2 kg |

Digital input module

| Model | GX90XD |
|------------------------------|---|
| Input types (inputs: 16) | DI or pulse input ^{*1} (Open collector or non-voltage contact) |
| | ON/OFF detection Open collector : Voltage of 0.5 V DC or less when ON, leakage current of 0.5 mA or less when OFF Non-voltage contact : Resistance of 200 Ω or less when ON, 50 kΩ when OFF |
| Contact rating | 12 V DC, 20 mA or more |
| Power supply and consumption | Supplied from main unit, power consumption : 0.7 W or less |
| Insulation resistance | Between input terminals and internal circuitry : 20 MΩ or greater (at 500 V DC) |
| Withstand voltage | Between input terminals and internal circuitry : 1500 V AC for one minute |
| Terminal types | M3 screw terminals or clamp terminals |
| Weight | Approx. 0.3 kg |

Pulse input specifications^{*1}

| | |
|-------------------------------|---|
| Counting system | The rising edge of the pulse is counted. |
| Max. pulse period | 250Hz (The chattering filter : OFF) 125Hz (The chattering filter : ON) |
| Minimum detection pulse width | Low (close), High (open), both is 2 ms or more |
| Pulse detection period | 1ms |
| Pulse measurement accuracy | ± 1 pulse |
| Pulse count interval | Measurement interval |
| Filter | The chattering filter can be switched On/Off. (When the chattering filter is off, connect GX/GP so that it is not affected by the noise.) |

*1 Integration requires the math function (/MT option).

Digital output module

| Model | GX90YD |
|------------------------------|---|
| Output types (outputs: 6) | Relay contact (c contact) |
| Rated load voltage | 100 to 240 V AC or 5 to 24 V DC |
| Max. load voltage/current | 264 VAC or 26.4 VDC, 3A/point (resistance load) |
| Power supply and consumption | Supplied from main unit, power consumption: 1.4 W or less |
| Insulation resistance | Between output terminals and internal circuitry: 20 MΩ (at 500 VDC) |
| Withstand voltage | Between output terminals and internal circuitry: 3000 V AC for one minute |
| Terminal types | M3 screw terminals |
| Weight | Approx. 0.3 kg |

Expandable I/O

| Model | GX60 |
|------------------------|--|
| Rated supply voltage | 100 to 240 VAC (allowable power supply voltage: 90 to 132 VAC, 180 to 264 VAC) |
| Rated supply frequency | 50 to 60 Hz |
| Power consumption | Max. 40 VA (100 VAC), max. 55 VA (240 VAC) |
| Insulation resistance | Between Ethernet terminal, isolated terminals, and ground 20 MΩ or more (at 500 VDC) |
| Withstand voltage | Between power terminal and ground: 3000 VAC (500/60 Hz)/1 min. Between I/O modules and ground: between each module's internal circuitry and depends on the specification of I/O module. |
| Weight | Approx. 3.2 kg (installing 6 modules) |

Digital input/output module

| Model | GX90WD |
|--------------------------|--|
| Input type (inputs: 8) | DI or pulse input ^{*2} (Open collector or non-voltage contact) |
| | ON/OFF detection Open collector : Voltage of 0.5 V DC or less when ON, leakage current of 0.5 mA or less when OFF Non-voltage contact : Resistance of 200 Ω or less when ON, 50 kΩ when OFF |
| Output type (outputs: 6) | Contact input rating 12 VDC, 20 mA or more |
| | Rated load voltage Relay contact (C contact) When connected to the main circuit (first-order power supply), 150 VAC or less When connected to a circuit derived from the main circuit (second-order power supply), 250 VAC or less (the main circuit is 300 VAC or less and uses an isolated transformer) or 30 VDC or less |
| Power consumption | 2 A (DC)/2 A (AC), resistive load |
| Insulation resistance | 1.9 W or less |
| Withstand voltage | Between input terminals and internal circuitry: 20 MΩ or greater (at 500 VDC) |
| | Between output terminals and internal circuitry: 20 MΩ or greater (at 500 VDC) |
| Terminal types | Between input terminals and internal circuitry: 1500 VAC for one minute Between output terminals and internal circuitry: 3000 VAC for one minute |
| Weight | M3 screw terminals |
| | Approx. 0.3 kg |

Each unit (GX/GP main unit and expandable I/O), can use 1 module only.

Pulse input specifications

Please see the pulse input specifications of Digital Input Module.

*2 Integration requires the math function (/MT option).

Pulse Input Module

| Model | GX90XP |
|-------------------------------|--|
| Number of inputs | 10 |
| Measurement interval | 100 ms (shortest) |
| Input type | Contact (open collector, voltage-free contact), level (5 V logic) |
| Input range | Up to 20 kHz * 30 Hz when the chattering filter is in use (On) |
| Minimum detection pulse width | 25 μs [*] * 15 ms when the chattering filter is in use (On) |
| Measurement accuracy | Count ± 1 pulse During integration, the following accuracies are added. Upon MATH start: +1 measuring period Upon MATH stop: -1 measuring period * Integration requires the math function (optional code /MT). |
| Chattering filter | Removes chattering up to 5 ms (can be turned on/off on each channel) |
| Hysteresis width | Approx. 0.2 V |
| Contact, transistor rating | Contact: 15 V DC or higher and 30 mA or higher rating. Minimum applicable load current 1 mA or less. Transistor: With the following ratings: Vce>15 VDC, Ic>30 mA |
| Maximum input voltage | ± 10 V DC |
| Insulation resistance | Between input terminals and internal circuitry: 20 MΩ or greater at 500 V DC |
| Withstand voltage | Between input terminals and internal circuitry: 1500 V AC for 1 minute |

PID control module

| Model | GX90UT | |
|--|-------------------------|--|
| Number of control loops | Number of loops | 2 |
| | Measured points | 2 |
| Analog input (measured input) | Measurement type | DC voltage (DCV)/standardized signal, TC/RTD, DI (LEVEL and non-voltage contact)/DC current (with external shunt resistance) |
| | Scan (control) interval | 100 ms or 200 ms (system global setting) |
| Analog output (control output/transmission output/sensor power supply) | Outputs | 2 |
| | Output type | Power supply for current, voltage pulse, or sensors. Current output: 4–20 mA or 0–20 mA Voltage pulse output: ON voltage = 12 VDC or more (load resistance 600 Ω or more), OFF voltage = 0.1 VDC or less Can be used as a sensor power supply (13.0–18.3 VDC) |
| Digital input (switching the SP, operation mode, etc.) | Inputs | 8 |
| | Input format | Non-voltage contact and open collector Contact rating: 12 VDC or more, 20 mA or more |
| Digital output (of alarms, events, etc.) | Outputs | 8 |
| | Output format | Open collector (sink type) |
| Withstand voltage/insulation resistance | Output contact capacity | Max 24 VDC, 50 mA |
| | | See PID control module general specifications (GS 04L51B01-31EN) |
| Terminal type | | M3 screw terminals |
| Weight | | Approximately 0.3kg |

GX10/GX20 MODEL AND SUFFIX CODES

| Model | Suffix Code | Optional code | Description |
|-------------------|-------------|---|---|
| GX10 | | | Paperless recorder (Panel mount type, Small display) ^{*14} |
| GX20 | | | Paperless recorder (Panel mount type, Large display) ^{*14} |
| Type | -1 | | Standard (Max. measurement channels: 100 ch) |
| | -2 | | Large memory (Max. measurement channels: 500 ch) ^{*12} |
| Display language | E | | English, degF, DST (summer/winter time) ^{*10} |
| Optional features | /AH | | Aerospace heat treatment |
| | /AS | | Advanced security function (Part 11) ^{*20} |
| | /BC | | Black cover |
| | /BT | | Multi-batch function ^{*21} |
| | /C2 | | RS-232 ^{*1} |
| | /C3 | | RS-422/485 ^{*1} |
| | /CG | | Custom display ^{*15} |
| | /D5 | | VGA output ^{*2} |
| | /E1 | | EtherNet/IP communication (PLC communication protocol) |
| | /E2 | | WT communication ^{*13} |
| | /E3 | | OPC-UA sever |
| | /E4 | | SLMP communication (Mitsubishi PLC) |
| | /FL | | Fail output, 1 point |
| | /LG | | Log scale |
| | /MT | | Mathematical function (with report function) |
| /MC | | Communication channel function | |
| /P1 | | 24 V DC/AC power supply | |
| /PG | | Program control function ^{*22} | |
| /UH | | USB interface (Host 2 ports) | |

GP10/GP20 MODEL AND SUFFIX CODES

| Model | Suffix Code | Optional code | Description |
|-------------------|-------------|---|--|
| GP10 | | | Paperless recorder (Portable type, Small display) ^{*14} |
| GP20 | | | Paperless recorder (Portable type, Large display) ^{*14} |
| Type | -1 | | Standard (Max. measurement channels: 100 ch) |
| | -2 | | Large memory (Max. measurement channels: 500 ch) ^{*12} |
| Display language | E | | English, degF, DST (summer/winter time) ^{*10} |
| Power supply | | 1 | 100V AC, 240V AC ^{*16} |
| | | 2 | 12 VDC ^{*17} |
| Power cord | | D | Power cord UL/CSA standard |
| | | F | Power cord VDE standard |
| | | R | Power cord AS standard |
| | | Q | Power cord BS standard |
| | | H | Power cord GB standard [*] |
| | | N | Power cord NBR standard |
| Optional features | | W | Screw terminal, power cord not included |
| | | /AH | Aerospace heat treatment |
| | | /AS | Advanced security function (Part 11) ^{*20} |
| | | /BT | Multi-batch function ^{*21} |
| | | /C2 | RS-232 ^{*1} |
| | | /C3 | RS-422/485 ^{*1} |
| | | /CG | Custom display |
| | | /D5 | VGA output ^{*2} |
| | | /E1 | EtherNet/IP communication |
| | | /E2 | WT communication ^{*13} |
| | | /E3 | OPC-UA sever |
| | | /E4 | SLMP communication (Mitsubishi PLC) |
| | | /FL | Fail output, 1 point |
| | | /LG | Log scale |
| | | /MT | Mathematical function (with report function) |
| | /MC | Communication channel function | |
| | /PG | Program control function ^{*22} | |
| | /UH | USB interface (Host 2 ports) | |

Analog input module, Digital I/O module:When the built-in module

Please add the following suffix codes to the main unit model and specification codes.

| Option | Optional code | Description | Models and numbers of units of modules included in the main unit |
|--|---------------|---|--|
| Optional features (Analog input) ^{*3,*11} | /UC10 | With analog input module, 10 ch (Clamp terminal) | GX90XA-10-U2N-CN x 1 |
| | /UC20 | With analog input module, 20 ch (Clamp terminal) ^{*7} | GX90XA-10-U2N-CN x 2 |
| | /UC30 | With analog input module, 30 ch (Clamp terminal) ^{*8} | GX90XA-10-U2N-CN x 3 |
| | /UC40 | With analog input module, 40 ch (Clamp terminal) ^{*5} | GX90XA-10-U2N-CN x 4 |
| | /UC50 | With analog input module, 50 ch (Clamp terminal) ^{*5} | GX90XA-10-U2N-CN x 5 |
| | /US10 | With analog input module, 10 ch (M3 screw terminal) | GX90XA-10-U2N-3N x 1 |
| | /US20 | With analog input module, 20 ch (M3 screw terminal) ^{*7} | GX90XA-10-U2N-3N x 2 |
| | /US30 | With analog input module, 30 ch (M3 screw terminal) ^{*8} | GX90XA-10-U2N-3N x 3 |
| | /US40 | With analog input module, 40 ch (M3 screw terminal) ^{*5} | GX90XA-10-U2N-3N x 4 |
| | /US50 | With analog input module, 50 ch (M3 screw terminal) ^{*5} | GX90XA-10-U2N-3N x 5 |
| Optional features (Digital I/O) ^{*4} | /CR01 | With digital I/O module, (Output:0, Input:16) ^{*8,*9} | GX90XD-16-11N-3N x 1 |
| | /CR10 | With digital I/O module, (Output:6, Input:0) ^{*8,*9} | GX90YD-06-11N-3N x 1 |
| | /CR11 | With digital I/O module, (Output:6, Input:16) ^{*7,*8,*9} | GX90XD-16-11N-3N x 1, GX90YD-06-11N-3N x 1 |
| | /CR20 | With digital I/O module, (Output:12, Input:0) ^{*6,*9} | GX90YD-06-11N-3N x 2 |
| | /CR21 | With digital I/O module, (Output:12, Input:16) ^{*6,*9} | GX90XD-16-11N-3N x 1, GX90YD-06-11N-3N x 2 |
| | /CR40 | With digital I/O module, (Output:24, Input:0) ^{*6,*9} | GX90YD-06-11N-3N x 4 |
| | /CR41 | With digital I/O module, (Output:24, Input:16) ^{*6,*9} | GX90XD-16-11N-3N x 1, GX90YD-06-11N-3N x 4 |

*1 /C2 and /C3 cannot be selected together.

*2 /D5 can be specified only for the GX20 or GP20.

*3 Only one option can be specified.

*4 Only one option can be specified.

*5 /UC40, /UC50, /US40 and /US50 cannot be specified for the GX10 or GP10.

*6 /CR20, /CR21, /CR40 and /CR41 cannot be specified for the GX10 or GP10.

*7 If /UC20 or /US20 is specified, /CR11 cannot be specified for the GX10 or GP10.

*8 If /UC30 or /US30 is specified, /CR01, /CR10 and /CR11 cannot be specified for the GX10 or GP10.

*9 A digital input module has M3 screw terminals.

*10 The Display language is selectable from English, German, French, Russian, Korean, Chinese, Japanese. To confirm the current available languages, please visit the following website.

URL: <http://www.yokogawa.com/ns/language/>

*11 Universal type (type suffix code: -U2). If you need anything other than universal type, purchase it separately.

*12 Large memory type can be specified only for the GX20/GP20.

*13 /MC option must be separately specified when the WT communication is selected.

*14 To connect an expandable I/O, you will need one expansion module for the GX/GP.

*15 Creating custom displays requires DXA170 DAQStudio (sold separately). (GX/GP does not have a creation function.)

*16 Power code can be specified the suffix code D, F, R, Q, H, or N.

*17 12 VDC power supply can be specified only for the GP10 without power code (suffix code: W).

*18 Optional code /MT (MATH) required if using the GX90XD's or GX90WD's pulse input.

*19 The /MT option (MATH) is required to perform pulse integration on GX90XP pulse input modules.

*20 When the Advanced Security function is ON the scan interval is 100 ms or more, and the Dual Interval function and PID modules are unavailable.

*21 When the Multibatch function is ON the scan interval is 500 ms or more, and the Dual Interval function is unavailable.

*22 Using the Program Control function requires the PID control module.

* When ordering units with built-in modules, the total number of channels allowed is 100 (10 modules) including any modules ordered individually.

**Analog input module, Digital I/O module:When the individual modules
MODEL and SUFFIX Code (GX90XA)**

| Model | Suffix Code | Description |
|--------------------|-------------|--|
| GX90XA | | Analog Input Module |
| Number of channels | -4 | 4 channels (-H0 type only) |
| | -6 | 6 channels (-R1 type only) |
| | -10 | 10 channels (-C1, -L1, -U2, -T1, -V1) |
| Type | -C1 | Current, scanner type (isolated between channels) |
| | -L1 | DCV/TC/DI, low withstand voltage scanner type (isolated between channels) |
| | -U2 | Universal, Solid state relay scanner type (3-wire RTD b-terminal common) |
| | -T1 | DCV/TC/DI, Electromagnetic relay scanner type (isolated between channels) |
| | -H0 | High speed universal, individual A/D type (isolated between channels) |
| | -R1 | 4-wire RTD/resistance, scanner type (isolated between channels) |
| | -V1 | DCV/TC/DI, high withstand voltage scanner type (isolated between channels) |
| | — | N |
| Terminal form | -3 | Screw terminal (M3) |
| | -C | Clamp terminal* |
| Area | N | General |

MODEL and SUFFIX Code (GX90WD)

| Model | Suffix code | Description |
|--------------------|-------------|---|
| GX90WD | | Digital Input/Output Module |
| Number of channels | -0806 | 8 channel DIs, 6 channel DOs |
| | | |
| Type | -01 | Input: Open collector/non-voltage contact (shared common), rated 5 VDC Output: Relay, SPDT (NO-C-NC) |
| | — | N |
| Terminal form | -3 | Screw terminal (M3) |
| Area | N | General |

MODEL and SUFFIX Code (GX90YD)

| Model | Suffix code | Description |
|--------------------|-------------|-----------------------|
| GX90YD | | Digital Output Module |
| Number of channels | -06 | 6 channels |
| | | |
| Type | -11 | Relay, SPDT(NO-C-NC) |
| | — | N |
| Terminal form | -3 | Screw terminal (M3) |
| Area | N | General |

MODEL and SUFFIX Code (GX60 Expandable I/O)

| Model | Suffix code | Description |
|--------------|-------------|--|
| GX60 | | I/O Base Unit |
| Type | -EX | I/O expansion |
| Area | N | General |
| Power supply | 1 | 100V AC, 240V AC |
| Power cord | D | Power cord UL/CSA standard |
| | F | Power cord VDE standard |
| | R | Power cord AS standard |
| | Q | Power cord BS standard |
| | H | Power cord GB standard |
| | N | Power cord NBR standard |
| | W | Screw terminal (power cord not included) |

* With GX90EX (I/O expansion module).

* The dummy cover is not attached to the GX60 when shipped from the factory. If you need the dummy cover, please purchase it separately.

MODEL and SUFFIX Code (GX90XP)

| Model | Suffix code | Description |
|--------------------|-------------|--|
| GX90XP | | Pulse Input Module |
| Number of channels | -10 | 10 channels |
| | | |
| Type | -11 | DC voltage/open collector/non-voltage contact (shared common), rated 5 VDC |
| | — | N |
| Terminal form | -3 | Screw terminal (M3) |
| | -C | Clamp terminal |
| Area | N | General |

MODEL and SUFFIX Code (GX90EX Expansion Module)

| Model | Suffix code | Description |
|--------|-------------|----------------------|
| GX90EX | | I/O Expansion Module |
| Port | -02 | 2 ports |
| Type | -TP1 | Twisted pair cable |
| — | N | Always N |
| Area | -N | General |

MODEL and SUFFIX Code (GX90XD)

| Model | Suffix Code | Description |
|--------------------|-------------|--|
| GX90XD | | Digital Input Module |
| Number of channels | -16 | 16 channels |
| | | |
| Type | -11 | Open collector/Non-voltage, contact (shared common), Rated 5 VDC |
| | — | N |
| Terminal form | -3 | Screw terminal (M3) |
| | -C | Clamp terminal |
| Area | N | General |

MODEL and SUFFIX Code (GX90YA)

| Model | Suffix Code | Description |
|--------------------|-------------|--|
| GX90YA | | Analog Output Module |
| Number of channels | -04 | 4 channels |
| | | |
| Type | -C1 | Current output (isolated between channels) |
| | — | N |
| Terminal form | -3 | Screw terminals (M3) |
| | -C | Clamped terminals |
| Area | N | General |

MODEL and SUFFIX Code (GX90UT)

| Model | Suffix Code | Description |
|-----------------|-------------|----------------------|
| GX90UT | | PID Control Module |
| Number of loops | -02 | 2 loops |
| | | |
| Function | -11 | 8 DIs, 8 DOs |
| | — | N |
| Terminal form | -3 | Screw terminals (M3) |
| Area | N | General |

Standard Accessories

| Product | Qty |
|---|-----|
| Mounting bracket (GX10 or GX20) | 2 |
| SD memory card (1GB) | 1 |
| Stylus | 1 |
| Tag sheet | 1 |
| Sheet (paper) | 1 |
| Power cord (for GP10 or GP20 of AC power supply only) | 1 |

Optional Accessories (Sold Separately)

| Product | Part Number/Model |
|---|-------------------|
| SD memory card (1GB) | 773001 |
| Mounting bracket (for GX10 or GX20) | B8740DY |
| Stylus pen (touch pen) | B8740BZ |
| Shunt resistor for screw terminal (M3) (10 Ω ± 0.1%) | 415942 |
| Shunt resistor for screw terminal (M3) (100 Ω ± 0.1%) | 415941 |
| Shunt resistor for screw terminal (M3) (250 Ω ± 0.1%) | 415940 |
| Shunt resistor for clamp terminal (10 Ω ± 0.1%) | 438922 |
| Shunt resistor for clamp terminal (100 Ω ± 0.1%) | 438921 |
| Shunt resistor for clamp terminal (250 Ω ± 0.1%) | 438920 |
| Dummy cover | B8740CZ |
| Validation Documents (For /AS option) | 773230 |

Application Software (sold separately)

| Model | Description | OS |
|--------|-----------------------|---|
| DXA170 | DAQStudio | Windows 7/8.1/10 |
| GA10 | Data Logging Software | Windows 7/8.1/10 Windows Server 2008/2012/2016 |

● **Calibration certificate (sold separately)**


When ordering the GX10/GX20/GP10/GP20 with options (analog input), the calibration certificate for the modules is included in and shipped with the calibration certificate of the main unit. When ordering an analog input module separately, each module gets its own calibration certificate (one certificate per module).

● **Test certificate (QIC, sold separately)**

When ordering the GX10/GX20/GP10/GP20 with options (analog/digital I/O), the QIC for each module is included in and shipped with the QIC of the main unit. When ordering analog input modules and digital I/O modules separately, each module gets its own QIC (one QIC per module).

● **User's Manual**

Product user's manuals can be downloaded or viewed at the following URL.
URL: www.smartdacplus.com/manual/en/

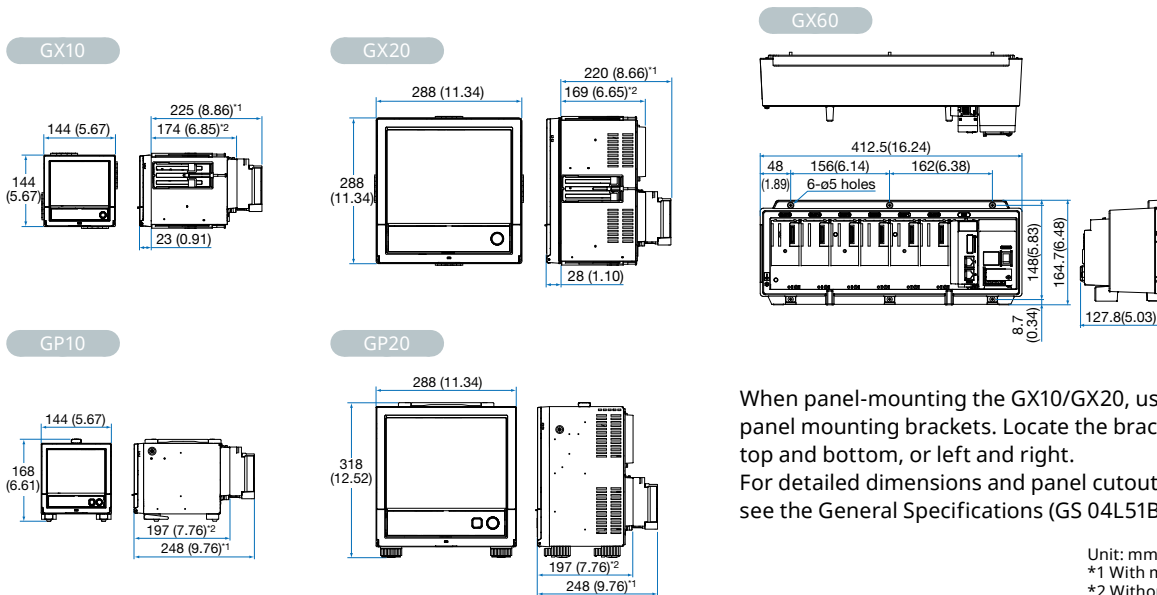

When panel-mounting the GX10/GX20, use two panel mounting brackets. Locate the brackets on the top and bottom, or left and right.
 For detailed dimensions and panel cutouts, please see the General Specifications (GS 04L51B01-01EN).

GM Data Acquisition System

Data logger that's flexible in form and function

This is a flexible data logger that combines the safety and ease of use that is made possible through our years of experience in measurement technology. Modules and functions are interchangeable with the GX/GP.

Flexibly scales to expand the number of channels

- Measure up to 420 ch
- Slide lock for easy attachment and removal

Easy access from a web browser

- Hardware settings
- Real time monitoring

Supports mobile connection

- Bluetooth communication
- Monitor and configure from a tablet

Open network

- Supports Modbus, Ethernet/IP, SLMP, OPC-UA server

Designed for high performance, high reliability

- High measurement accuracy
- Redundancy through internal and external memory, plus media

Environmental and noise resistance

- Wide operating temperature range: -20 to 60 DEG C



Configuration example

(When ordering individual instruments)
 (with supply voltage of 100 to 240 VAC, universal input, and screw terminal)

30 ch (analog input)

GX20-1E x1
 GX90XA-10-U2N-3N x3



120 ch (analog input)

GX20-2E x 1
 GX90EX-02-TP1N-N (for main unit) x 1
 GX60-EXN1W
 (including GX60 Expandable I/O) x 1
 GX90XA-10-U2N-3N x 12



450 ch (analog input)

GX20-2E x 1
 GX90EX-02-TP1N-N(for main unit) x 1
 GX60-EXN1W
 (including GX60 Expandable I/O) x 6
 GX90XA-10-U2N-3N x 45




Analog input module scan interval and measurement type

| Type | Channels | Scan interval (shortest) | Scanner | TC | RTD | DCV | DI | mA | Resistance | Feature |
|-----------------------------------|----------|--------------------------|---------|----|-----|-----|----|----|------------|------------------------|
| Universal (-U2) | 10 | 100ms | SSR | ○ | ○ | ○ | ○ | | | Universal |
| Low withstand voltage relay (-L1) | 10 | 500ms | SSR | ○ | | ○ | ○ | | | Mid-price |
| Electromagnetic relay (-T1) | 10 | 1s | Relay | ○ | | ○ | ○ | | | Noise-resistance |
| DC current input (-C1) | 10 | 100ms | SSR | | | | | ○ | | mA only |
| High withstand voltage (-V1) | 10 | 100ms | SSR | ○ | | ○ | ○ | | | High withstand voltage |
| High speed universal (-H0) | 4 | 1ms | — | ○ | ○ | ○ | ○ | | | High speed measurement |
| 4-wire RTD/resistance (-R1) | 6 | 100ms | SSR | | ○ | | | | ○ | 4-wireRTD |

Data Logging Software GA10 (sold separately)

Centrally acquire data from multiple devices on a PC

GA10 is a PC based software package that acquires real time data from SMARTDAC+ data acquisition systems and other devices connected to a network. Connected PCs can monitor real time and historical data, which can be stored on a PC harddrive or centrally on a network drive.

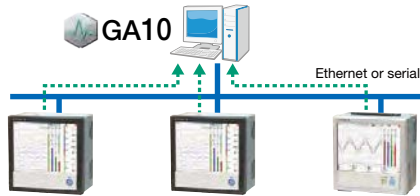

Max. connectable units: **100**
 Max. recording tags (channels): **2,000**
 Scan interval: **100 ms** (channels)

Compatible with other models in addition to the GX/GP!



DX series



μR series



SMARTDAC+ GM

Supports many other models. For details, see the GA10 catalog.

Aggregate data for monitoring!



Easy to read screen layouts provide operator friendly real time monitoring.

- Group channels any way you like
- Play back data up to recording start, even during measurement
- Instantly recognize alarms (in red)

Save the data all together!



Binary


Excel

Data is stored in a binary tamper proof format preventing unauthorized access. Data can also be exported to excel format for data manipulation and analysis.

Application example

Data monitoring in manufacturing sites


Monitor factory data from the office.
 You can also add clients and share data across multiple PCs.

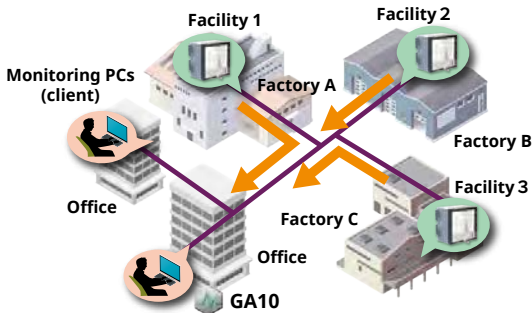

Effect: No more moving around large factories to do work!

Recording data from multiple equipments

Saves testing/manufacturing equipment data on a PC. In addition to simultaneous acquisition, you can acquire data from different equipment at different timing (multilogging).

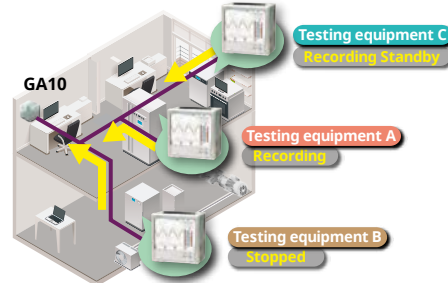

Effect: Manage all data on the PC, one set of equipment at a time!

OpreX™

Yokogawa achieves operational excellence by providing products, services, and solutions based on the OpreX comprehensive brand that cover everything from business management to operations.

Co-innovating tomorrow and Oprex are trademarks or registered trademarks of Yokogawa Electric Corporation. All brand or product names of Yokogawa Electric Corporation in this bulletin are trademarks or registered trademarks of Yokogawa Electric Corporation. All other company brand or product names in this bulletin are trademarks or registered trademarks of their respective holders.

NOTICE



Before operating the product, read the instruction manual thoroughly for proper and safe operation.

YOKOGAWA ELECTRIC CORPORATION

Control Instruments Sales Division
 E-mail: ns@cs.jp.yokogawa.com

<http://www.yokogawa.com/>

YOKOGAWA CORPORATION OF AMERICA

YOKOGAWA EUROPE B.V.

YOKOGAWA ENGINEERING ASIA PTE. LTD.

<http://www.yokogawa.com/us/>

<http://www.yokogawa.com/eu/>

<http://www.yokogawa.com/sg/>

Sign up for our free e-mail newsletter
www.yokogawa.com/ns/

Subject to change without notice
 All Rights Reserved. Copyright © 2012, Yokogawa Electric Corporation

AZ-S-2E
 Printed in Japan, 003(AZ) [Ed:10/d]