# **IPC-623**

#### 4U 20-Slot Rackmount Chassis with Multi-System and Front-Accessible Redundant Power Supply




#### **Features**

- 4U rackmount chassis supports up to 4 multi-systems
- Front-accessible redundant power supply
- Shockproof disk drive bay design can hold up to three front-accessible 5.25" and one 3.5" disk drives, and one internal 3.5" HDD
- Three 12 cm / 114 CFM ball-bearing cooling fans
- Front LEDs and audible alarm notifications for system power status, fan operation, HDD status, and in-chassis temperature monitoring
- Dual top cover designed for easy maintenance
- · Five easily replaceable air filters provide good airflow

## C € FCC

## **Specifications**

		External	Internal
Drive Bay	3.5"	1	1
	5.25"	3	-
Cooling	Fan	3 (12 cm / 114 CFM each)	
	Air Filter	4 (200 x 45 mm) + 1 (128 x 95 mm)	
Miscellaneous	LED Indicators	Power, HDD, fan, temperature, and power voltage status	
	Control	Power switch, system reset (reserve 3 more for quad-system) and alarm reset buttons	
	Hold-down Clamp	Hold-down clamp with rubber pad underneath and accessory rubber cushions	
Environment		Operating	Non-Operating
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	-20 ~ 60 °C (-4 ~ 140 °F)
	Humidity	10 ~ 85% @ 40 °C, non-condensing	10 ~ 95% @ 40 °C, non-condensing
	Vibration (5 ~ 500 Hz)	1 Grms	2 G
Physical Characteristics	Dimensions (W x H x D)	482 x 177 x 657 mm (19" x 7" x 26")	
	Weight	26 kg (57 lb)	





Power voltage status

Hold-down clamp with rubber pads underneath



Three 114 CFM hot-swappable fans

Single power supply



Extra drive bay which can hold up to three 3.5" HDDs



Dual AC power cords for redundant power supply




Front panel appearance while with single power supply configuration

AD\ANTECH Industrial Chassis

All product specifications are subject to change without notice.

#### **IPC-623**

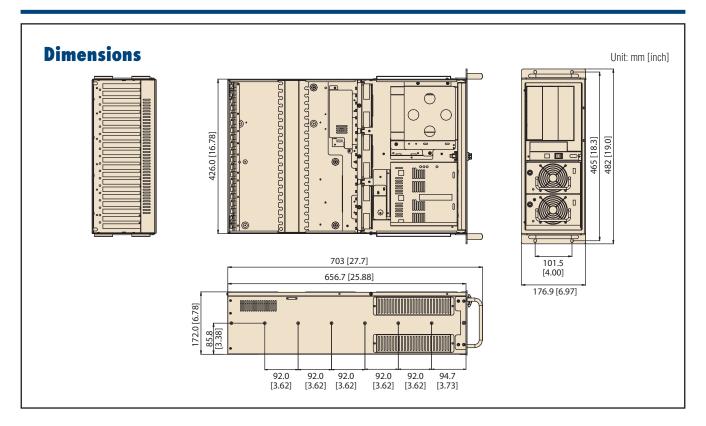

## **Ordering Information**

 Part Number
 Power Supply

 IPC-623BP-00XBE
 Barebone chassis for single power supply

 IPC-623BP-00RBE
 Barebone chassis for redundant power supply

## **Power Supply Options**

Part Number	Specifications	
Fart Number	Watts	Input
96PS-A400WPS2-2 (Single)	400W (ATX, PFC)	AC 100 ~ 240 V (full range)
96PS-A500WPS2-2 (Single)	500W (ATX, PFC)	AC 115 ~ 240 V (full range)
96PSR-A460WOTH-2 (1+1 redundant)	460W (ATX, PFC)	AC 100 ~ 240 V (full range)

## **Optional Accessories**

Part Number	Description
IPC-DT-3120E	Mobile rack for converting a 3.5" drive bay to dual 2.5" SATA HDD trays
IPC-DT-5230E	Mobile rack for converting dual 5.25" drive bays to three 3.5" SATA HDD trays
1700002459	Reset button with wire

## **Spare Parts**

Part Number	Description
2130004799S000	Side filter 45 x 200 x 6 mm
2130004800S000	Door filter 130 x 95 x 6 mm