


SRP-FPV240-AE

MultiMonitor ACP Ready ThinClient, 1x HDMI, 1x DP

NEW

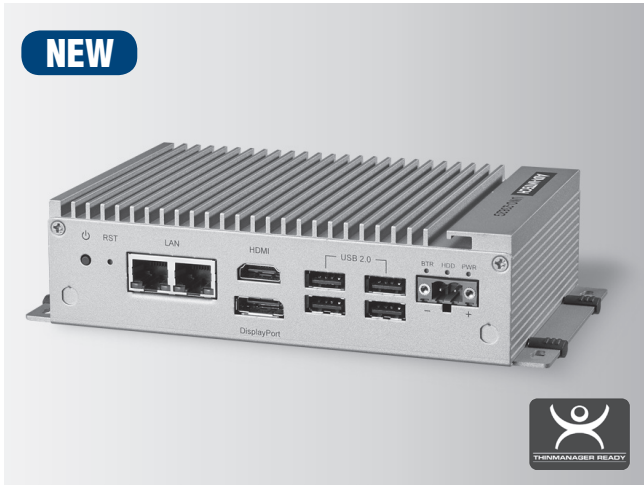

Features

- Verified with ACP ThinManager, ACP BIOS Enabled
- 2 simultaneous, independent MultiMonitor digital video ports: 1 x HDMI, 1 x DisplayPort,
- 1 x GbE, 4 x USB 2.0, 1 x RS-232, 1 x RS-485
- Daisy-Chain for Ethernet with auto-bypass protection enabled
- Comprehensive Palm, Small, Regular-size form-factor
- Compact with Fanless Design

Introduction

Realize the true value of thin client and centralized management technologies with Advantech's ThinManager Compatible industrial thin clients. ACP's ThinManager, the leading thin client solution for the factory floor, and Advantech's industrially hardened thin client hardware provide a unique solutions for centralized management of factory floor applications. The SRP-FPV240-AE is the perfect ThinManager MultiMonitor industrial thin client for applications where flexibility and cost savings of 2 monitors per client is desired. The SRP-FPV240-AE also supports the newest digital video interfaces such as: DisplayPort and HDMI.

Specifications

General

- **Certification** CE, FCC, UL, CCC, BSMI
- **Dimensions (W x D x H)** 190 x 107 x 47 mm (7.5" x 4.2" x 1.8")
- **Form Factor** Small Size
- **Enclosure** Aluminum Housing
- **Mounting** Stand, Wall, VESA (Optional)
- **Weight (Net)** 1.0kg (2.2lbs)
- **Power Requirement** 24VDC \pm 15%
- **Power Consumption** 14W (Typical), 24W (Max)

System Hardware

- **BIOS** ACP BIOS enabled
- **Processor** AMD G-series T40E 1.0GHz dual core, 512MB
- **Memory** On-board 2GB DDR3 833/1066 MHz
- **Graphics Engine** AMD Radeon™ HD 6250 DirectXR 11 graphics with UVD 3.0 2D/3D Accelerator
- **Ethernet** Realtek RTL8111E, Marvell 88E6172 Giga Ethernet switch with daisy chain technology
- **LED Indicators** LEDs for Power, battery, LAN (Active, Status)

I/O Interfaces


- **Serial Ports** 1 x RS-232, DB9
1 x RS-485, DB9
- **LAN Ports** 2 x RJ45, 10/100/1000 Mbps (Built-in switch for daisy chaining supports 1 IP address only)
- **USB Ports** 4 x USB 2.0
- **Displays** 1 x DisplayPort 1.1, supports 1920x1200 (HD 6250) @ 30 bpp
1 x HDMI v1.3, supports 1920x1080p @ 36 bpp
- **Power Connector** 1 x 2 Pins, Terminal Block
- **Grounding Protection** Chassis Grounding

Environment


- **Operating Temperature** - 10 ~ 60°C (14 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow
- **Storage Temperature** - 40 ~ 85°C (-40 ~ 185°F)
- **Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- **Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- **Vibration Protection** Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis
- **Ingress Protection** IP40

Installation Scenario

DIN-rail Mount Illustration




VESA Mount Illustration




Dimensions


Unit: mm

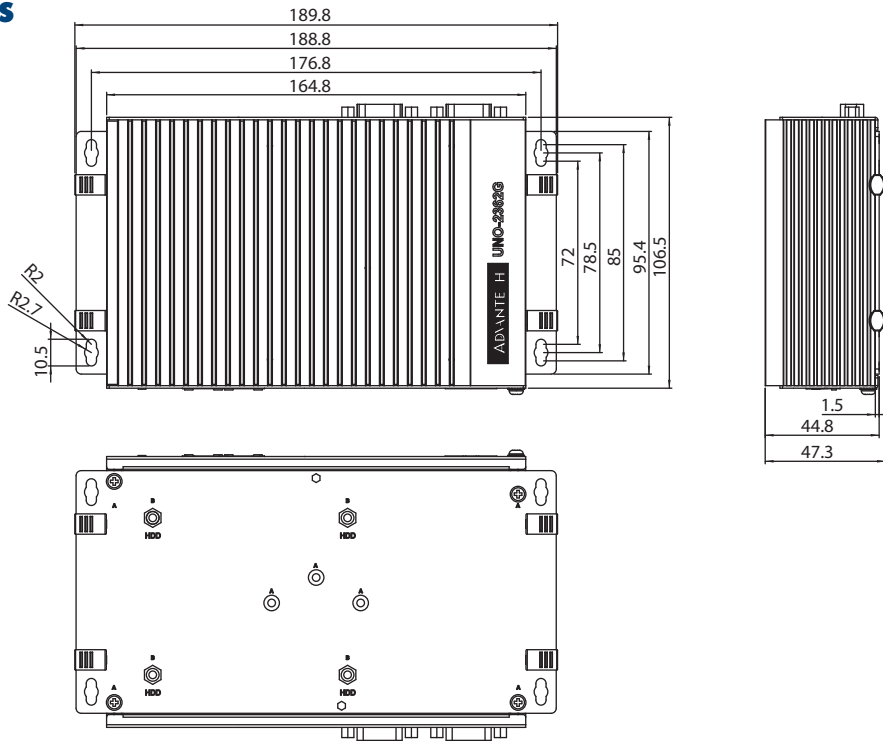

Front I/O View

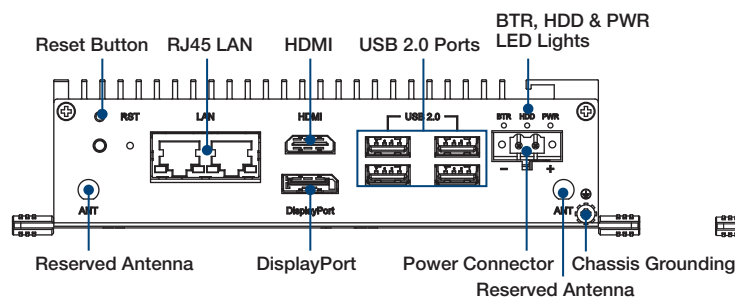

Rear I/O View

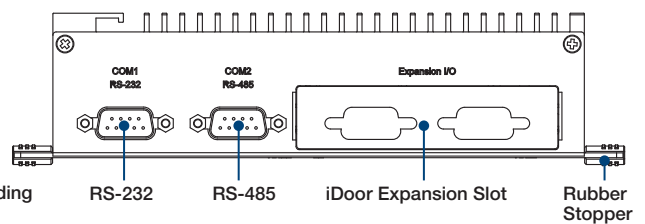

Ordering Information

- **SRP-FPV240-AE** UNO-2362G-T2AE, ACP Ready ThinClient, HDMI x 1, DP x 1

Optional Accessories

- **96PSA-A60W24T2** 100-240V 60W 24V 2.5A Power Adapter
- **1702002600** Power Cable US Plug 1.8 M (Industrial Grade)
- **1702002605** Power Cable EU Plug 1.8 M (Industrial Grade)
- **1702031801** Power Cable UK Plug 1.8 M (Industrial Grade)
- **1700000596** Power Cable China/Australia Plug 1.8 M (Industrial Grade)
- **UNO-2000G-DMKAE** UNO-2000 DIN Rail Kit
- **UNO-2000G-VMKAE** UNO-2000 VESA Mount Kit

Monitor Cabling Accessories

*Available in America

- **XACP-10DP-DPHM-10** DisplayPort to HDMI Cable, 10ft
- **XACP-10DP-DPDI-10** DisplayPort to DVI Cable, 10ft
- **XACP-10HM-15128-03** HDMI to DVI Cable, 10ft
- **XACP-10DP-DPDP-10** DisplayPort to DisplayPort Cable, 10ft
- **XACP-10HM-128V4-10** HDMI to HDMI Cable, 10ft