

# NCP-3110

## 1U Packetarium™ Network Processor Platform



### Features

- Advantech Packetarium™ based Network Appliance
- Supports two 2.5" SATA HDD/SSD bays
- Eight 1GbE Ethernet RJ45 ports
- Two 10GbE SFP+ ports
- Four Metallic/LAN bypass pairs
- IEEE 1588v2 Support (optional)
- Synchronous Ethernet Support (optional)
- TurboDPI Support (optional)

### Introduction

The NCP-3110 represents the entry level Advantech Packetarium™ network appliance. It integrates powerful and multi-core Packetarium™ network processing card for wire speed packet processing. The system supports up to 40Gbps I/O interfaces with Cavium CN6880 32 core 1.2GHz processor. The default system configuration features two 10GbE fiber SFP+, eight 1GbE copper RJ45, 1GbE management port, two USB sockets, a console port and two extractable 2.5" SATA SSD/HDD bays.

NCP-3110 supports precision clock synchronization mechanisms SyncE (optional) and IEEE1588v2 (optional), for time critical applications. SyncE features  $\pm 4.6\text{ppm}$  accuracy; on the other hand, IEEE1588v2 provides  $\pm 100\text{ppm}$  accuracy with the advantage of economical implementation cost. In addition, LAN bypass design prevents single point of failure on mission critical networks when custom-defined software or hardware events are detected.


Cavium TurboDPI technology utilizes a hardware DPI engine for low latency pattern matching and delivers unprecedented packet processing performance. NCP-3110 is ideal for ODM enterprise applications such as content-aware applications, firewalls, UTMs, application-based routing and subscriber-based services.

### Specifications


Processor System	Storage Interface Processor	Cavium CN6880	
	Max. Speed	1.2 GHz	
	Processor Cores	32cores	
Memory		DDR3 16 GB (4 x 4 GB RDIMM) (Optional: 32GB)	
Network Interface	I/O Board Information	8 x GbE RJ-45 2 x 10GbE SFP+	
	Management Port	1 x GbE RJ-45	
Storage System	Controller	1 x Sii3132	
	Storage Interface	2 x 2.5" SATA2 HDD/SSDs 2 x USB2.0	
I/O Interface	Serial Port	1 x RJ-45 type console port	
Power	Type/Watt	AC: 220 W	
	Input	AC: 100 ~ 240 V <sub>AC</sub>	
Cooling	Fan	4 x Smart Fans	
Physical Characteristics	Dimension (W x H x D)	430 x 44 x 349 mm	
	Weight	7.2 Kg	
Environment		Operating	Non-Operating
	Temperature	0 ~ 40° C (32 ~ 104° F)	-20 ~ 70° C (-4 ~ 158° F)
	Humidity	20% to 90% RH	5% to 95% RH
Compliance	EMC/Safety	CE/FCC/UL/CB/CCC	

**Dimensions**

Unit: mm

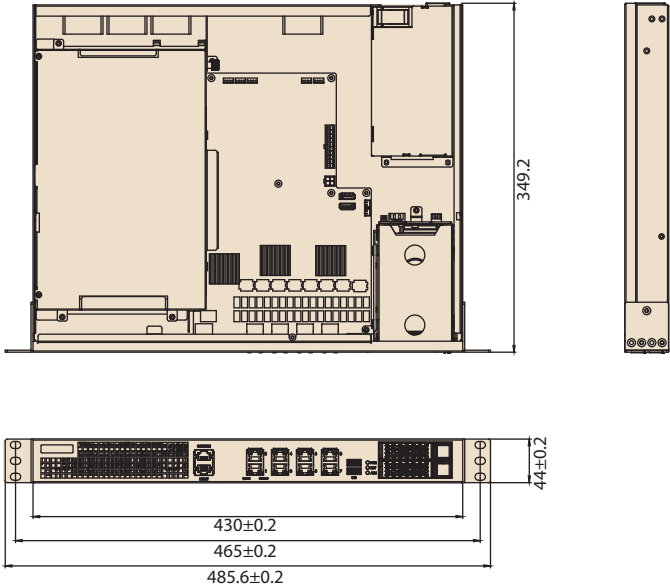

**Front Panel**

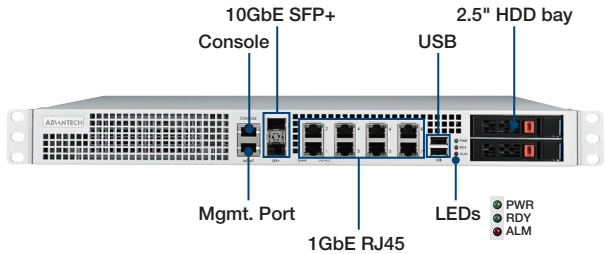

**Ordering Information**

Part Number	Description
NCP-3110-X3A0BE	4x4GB DDR3 RDIMM
NCP-3110-X3A1BE	4x8GB DDR3 RDIMM

**Compatible Packetarium™ Card**

NCPB-2320-01	Cavium Octeon II CN6880
	32 Cores 1.2GHz
	1 x PCIe4
	2 XAUI & 2 SGMIIx4 (or 4 XAUI)