


SD 01E21K01-01EN

Cable Finish: Finished

Unit: mm (approx. in.)

AX01C-■□□□  
■=B, C, D

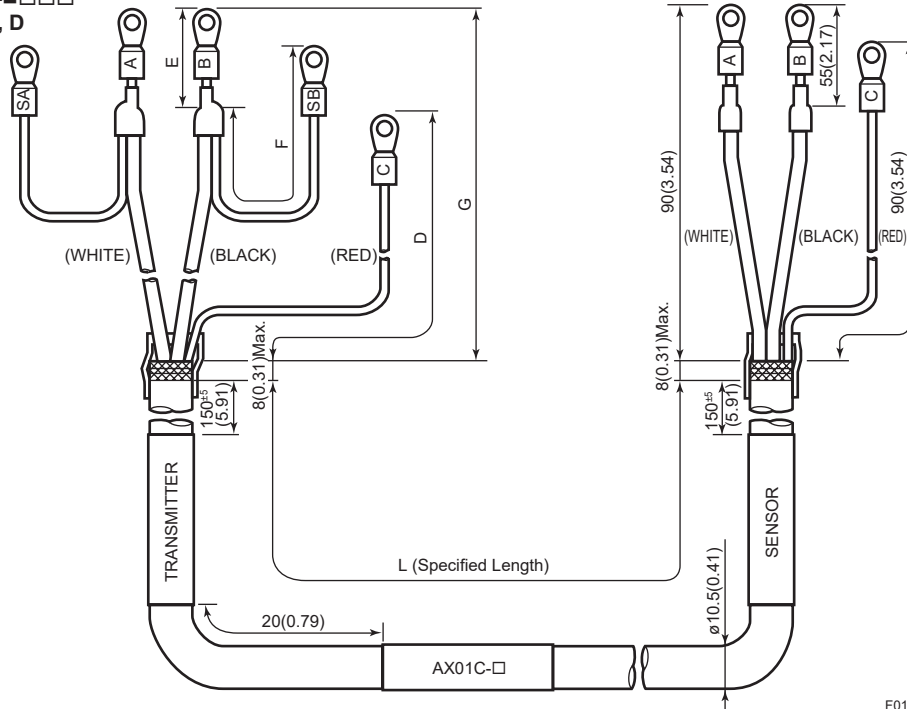


F01.ai

Unit: mm (approx. in.)

| Specification Code | Length   |          |          |          | Description      |
|--------------------|----------|----------|----------|----------|------------------|
|                    | D        | E        | F        | G        |                  |
| AX01C-B□□□         | 70 (2.8) | 25 (1.0) | 50 (2.0) | 60 (2.4) | For AXG1A        |
| AX01C-C□□□         | 60 (2.4) | 25 (1.0) | 70 (2.8) | 50 (2.0) | For AXG4A, AXW4A |
| AX01C-D□□□         | 70 (2.8) | 25 (1.0) | 50 (2.0) | 60 (2.4) | For AXFA11       |

Cable Finish: Unfinished

AX01C-■□□□  
■=A

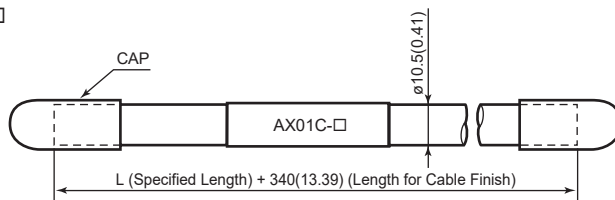

F02.ai

Unless otherwise specified, difference in the dimensions are specified as : General tolerance = ± (Criteria of tolerance class IT18 in JIS B0401-1) / 2