



UC12

Ultrasonic technology housed in an industry-proven design

ULTRASONIC SENSORS

SICK
Sensor Intelligence.


Advantages



Virtually unlimited use – regardless of color, gloss, and transparency

SICK ultrasonic sensors perform measurement and detection tasks in a wide variety of application areas on colored, shiny, or transparent surfaces, which are particularly challenging for optical sensors. Even adverse ambient conditions such as dust, dirt, or fog hardly affect the measurement result. The broad detection range also allows for a large field to be monitored with just one sensor – with a measuring range of 13 mm to 8 m. No matter where they are: the ultrasonic sensors from SICK are at your side in any industry. The extensive product portfolio offers you a wide range of solutions for your application. See for yourself.


Find out more about the principle of operation of the ultrasonic sensors.

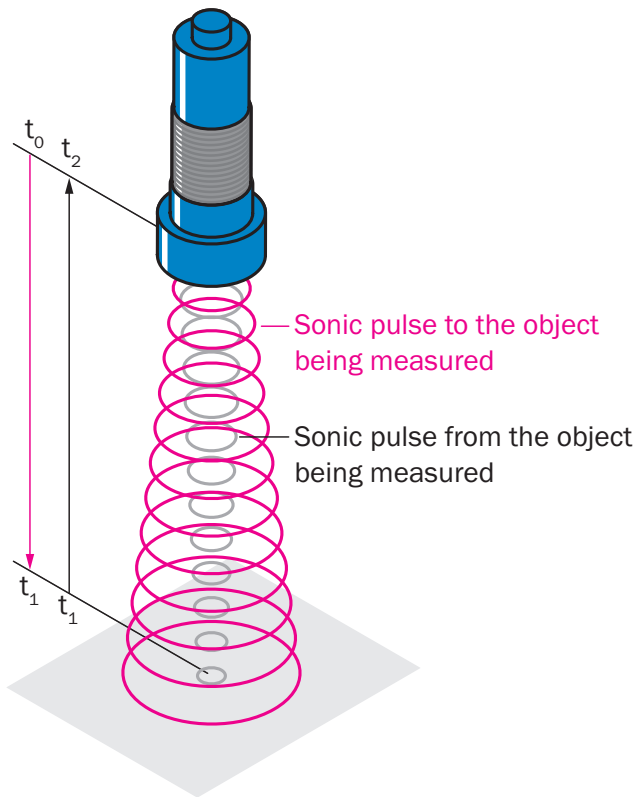

(Acoustic) time-of-flight measurement


The sensor emits an acoustic pulse that is reflected by the object being detected. The time required for the pulse to go from the sensor to the object and come back again is measured, evaluated and converted into the distance as follows.

Distance = speed of sound x total acoustic time of flight (t2) / 2

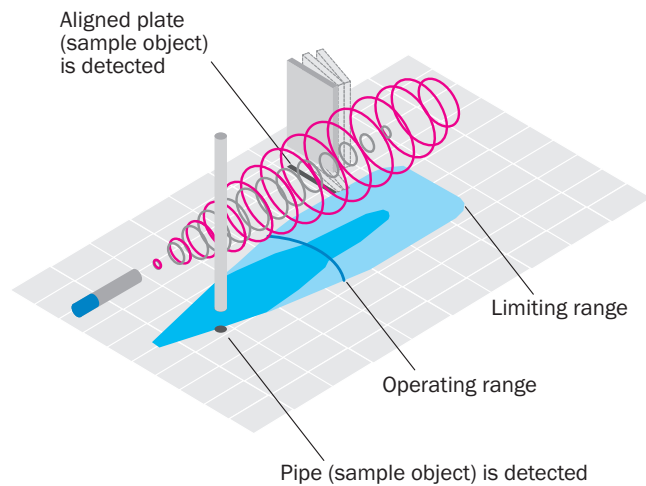


Scanning range of ultrasonic sensors

In general on ultrasonic sensors, the less sound the object being measured absorbs, the greater the possible scanning range. The operating range specifies the distance up to which measurement on common objects with sufficient operating reserves is possible. Under ideal conditions, the sensor can even be used up to its limiting range. Switch panels are used for ideal assessment of application capability. The dark blue area shown in these switch panels shows an example of the sensor's working range if a round rod is detected. The light blue area shows the maximum detection range (limiting range) which can be achieved under ideal conditions for easily detectable objects, such as the aligned plate given here. This area between the sensor and the measuring object should be kept free of other objects to prevent them from being detected accidentally. The detectability and detection range of an object depend on its reflective properties, size, and alignment. Depending on the application, the sensor may also be able to detect very small objects, e.g. metal wire.

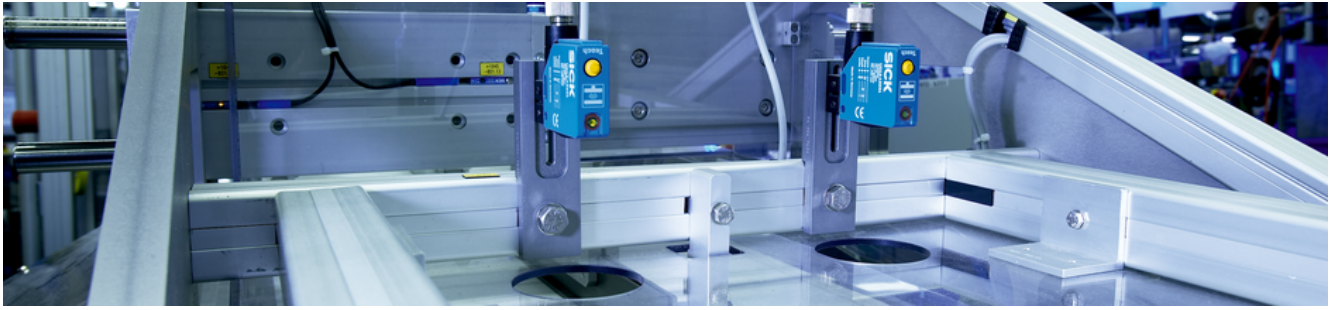

Applications in focus

Ultrasonic sensors are true all-rounders. SICK ultrasonic sensors demonstrate their reliability and precision in virtually any application, from measuring distances or detecting solid, powdered, or liquid media. No matter the industry, no matter the application.

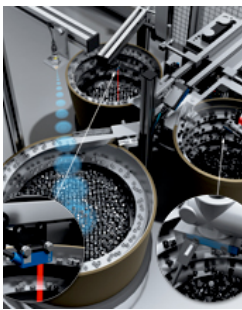


SICK ultrasonic sensors show their strengths in the contact-free detection of objects in all imaginable applications. These all-rounders reliably and precisely master all automation requirements on your processes.

SICK LifeTime Services

SICK's services increase machine and plant productivity, enhance the safety of people all over the world, provide a solid foundation for a sustainable business operation, and protect investment goods. In addition to its usual consulting services, SICK provides direct on-site support during the conceptual design and commissioning phases as well as during operation.

The range of services not only covers aspects like maintenance and inspection, but also includes performance checks as well as upgrades and retrofits. Modular or customized service contracts extend the service life of plants and therefore increase their availability. If faults occur or limit values are exceeded, these are detected at all times by the corresponding sensors and systems.

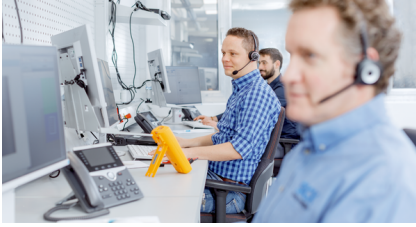**Consulting and design**

Application-specific advice on the product, its integration and the application itself.

**commissioning and maintenance**

Application-optimized and sustainable — thanks to professional commissioning and maintenance by a trained SICK service technician.

**service contracts**

Extended warranty, SICK Remote Service, 24-hour helpdesk, maintenance, availability guarantees and other modular components can be individually combined on request.



Technical data overview

Measuring range	Operating range	20 mm ... 250 mm (depending on type)
	Limiting range	250 mm / 350 mm (depending on type)
Resolution		≥ 0.1 mm
Repeatability		± 0.15 %
Response time		30 ms
Output time		8 ms
Switching frequency		25 Hz
Digital output	Type	PNP / NPN (depending on type)
Enclosure rating		IP65 / IP67
Sending axis		Straight

Product description

Ultrasonic technology provides reliable results where optical sensors reach their limits. The UC12 shares the same housing as common photoelectric sensors. In addition a single teach-in button enables easy setup. Dark or transparent objects are easily detected.

At a glance

- Transparent foils, glass, liquids and bottles are detected, regardless of the material color and ambient light
- Easy and quick teach-in with teach-in button
- Insensitive to dirt, dust and fog
- Two complementary digital outputs (Q, /Q)
- Very good background suppression (BGS)
- Three operating modes: Distance to Object (DtO), Window (Wnd) or Object between sensor and background (ObSB)

Your benefits

- Fast commissioning due to single-button teach-in
- Full mechanical compatibility to photoelectric sensors increase application flexibility without machine modification
- Standard proximity, window and reflection modes provide application flexibility, which increases reliability and productivity
- Integrated temperature compensation ensures high measurement accuracy
- Complementary switching outputs immediately signal broken wiring, reducing faulty production results

Ordering information

Other models and accessories → www.sick.com/UC12

- **Operating range, limiting range:** 20 mm ... 150 mm, 250 mm
- **Connection type:** male connector, M12, 4-pin
- **Response time:** 30 ms
- **Communication interface:** -
- **Weight:** 75 g
- **Sending axis:** straight

Digital output	Type	Part no.
2 x NPN	UC12-11235	6029833
2 x PNP	UC12-11231	6029831

- **Operating range, limiting range:** 55 mm ... 250 mm, 350 mm
- **Connection type:** male connector, M12, 4-pin
- **Response time:** 30 ms
- **Communication interface:** -
- **Weight:** 75 g
- **Sending axis:** straight

Digital output	Type	Part no.
2 x NPN	UC12-12235	6029834
2 x PNP	UC12-12231	6029832

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com