

# XS1ro/XS2ro Dual Channel Safety Relay Modules



## Datasheet

### Models

Model	Description
XS1ro	1 Dual Channel Safety Relay Module (2 N.O./1 N. C.)
XS2ro	2 Dual Channel Safety Relay Module (2 N.O./1 N.C. each)

### Terminal Assignment


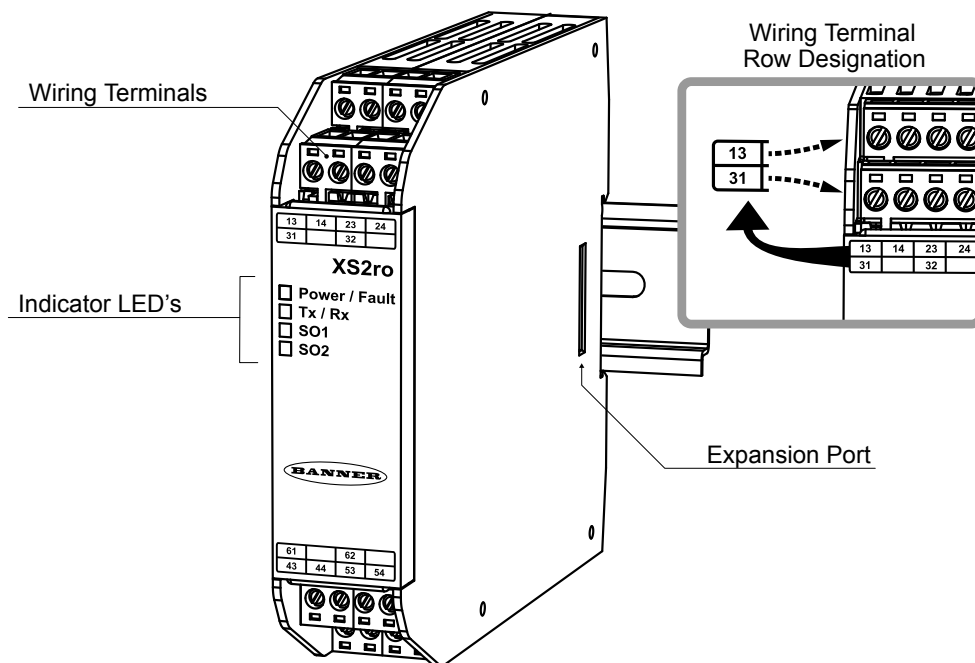


Figure 1. XS2ro



\*Only present in XS2ro.  
If driving external relays, EDM should be configured to monitor the state of these external relays.

Figure 2. Contact Configuration

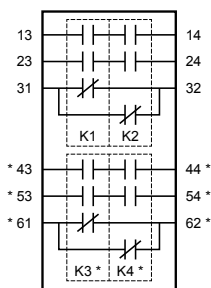

## Specifications

### Mechanical Stress

Shock: 15 g for 11 ms, half sine, 18 shocks total (per IEC 61131-2)  
 Vibration: 3.5 mm occasional / 1.75 mm continuous at 5 Hz to 9 Hz,  
 1.0 g occasional and 0.5 g continuous at 9 Hz to 150 Hz: all at 10  
 sweep cycles per axis (per IEC 61131-2)

### Safety

Category 4, PL e (EN ISO 13849)  
 SIL CL 3 (IEC 62061, IEC 61508)

### Product Performance Standards

See Standards and Regulations section in the Instruction Manual for a  
 list of industry applicable U.S. and international standards

### EMC

Meets or exceeds all EMC requirements in IEC 61131-2, IEC 62061  
 Annex E, Table E.1 (increased immunity levels), IEC 61326-1:2006,  
 and IEC61326-3-1:2008

### Bus Power

XS1ro 0.125 A (outputs On)  
 XS2ro: 0.15 A (outputs On)

### Maximum Power

2000 VA, 240 W

### Electrical Life

50,000 cycles at full resistive load

### Overvoltage Category

III

### Pollution Degree

2

### Mechanical Life

40,000,000 cycles

*Note: Transient suppression is recommended when switching inductive  
 loads. Install suppressors across load. Never install suppressors across  
 output contacts.*

### Safety Ratings

PFH [1/h]:  $7.6 \times 10^{-10}$   
 Proof Test Interval: 20 years

### Certifications



### Operating Conditions

Temperature: 0 °C to +55 °C (+32 °F to +131 °F)  
 Storage Temperature: -30 °C to +80 °C (-34 °F to +176 °F)

### Environmental Rating

NEMA 1 (IEC IP20), for use inside NEMA 3 (IEC IP54) or better  
 enclosure

### Removable Screw Terminals

Wire size: 24 to 12 AWG (0.2 to 3.31 mm<sup>2</sup>)  
 Wire strip length: 7 to 8 mm (0.275 in to 0.315 in)  
 Tightening torque: 0.565 N·m (5.0 in-lb)

### Removable Clamp Terminals

*Important: Clamp terminals are designed for 1 wire only. If more than  
 1 wire is connected to a terminal, a wire could loosen or become  
 completely disconnected from the terminal, causing a short.*

Wire size: 24 to 16 AWG (0.20 to 1.31 mm<sup>2</sup>)  
 Wire strip length: 8.00 mm (0.315 in)

### Contact Rating

#### UL/NEMA:

- N.O. Contacts: 6 A 250 V ac/24 V dc resistive; B300/Q300 pilot duty
- N.C. Contacts: 2.5 A 150 V ac/24 V dc resistive; Q300 pilot duty

#### IEC 60947-5-1:

- N.O. Contacts: 6 A 250 V ac/dc continuous; AC 15: 3 A 250 V; DC13: 1 A 24 V/4 A 24 V 0.1 Hz
- N.C. Contacts: 2.5 A 150 V ac/dc continuous; AC 15: 1 A 150 V; DC13: 1 A 24 V/4 A 24 V 0.1 Hz

### Contact Ratings to preserve 5 µm AgNi gold plating

	Minimum	Maximum
Voltage	100 mV ac/dc	60 V ac/dc
Current	1 mA	300 mA
Power	1 mW (1 mA)	7 W (7 VA)

### Feature ID (FID) Compatibility

For Feature ID (FID) compatibility between a Base Module and the  
 Expansion Modules, see XS26-2/SC26-2 Base Safety Controllers  
 datasheet p/n 175119.



**Important:** The Safety Controller and all solid state output expansion modules should be connected only to a SELV (Safety Extra-Low Voltage), for circuits without earth ground or a PELV (Protected Extra-Low Voltage), for circuits with earth ground power supply.

## Banner Engineering Corp. Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: [www.bannerengineering.com](http://www.bannerengineering.com).